

03-20-00

A

SIDLEY & AUSTIN
A PARTNERSHIP INCLUDING PROFESSIONAL CORPORATIONS

CHICAGO
LOS ANGELES
NEW YORK
WASHINGTON, D.C.

717 NORTH HARWOOD
DALLAS, TEXAS 75201
TELEPHONE 214 981 3300
FACSIMILE 214 981 3400

HONG KONG
LONDON
SHANGHAI
SINGAPORE
TOKYO

FOUNDED 1866

WRITER'S DIRECT NUMBER
(214) 981-3328

WRITER'S E-MAIL ADDRESS
pplap@sidley.com

March 17, 2000

Assistant Commissioner
for Patents
Box Patent Application
Washington, DC 20231

Express Mail Mailing Label No.: EL195378566US

Date of Deposit: MARCH 17, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the dated indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

DERRICK T. GORDON

Name of Applicant, Assignee, or Registered Representative

Derrick T. Gordon
Signature

MARCH 17, 2000

Date of Signature

Re: U.S. Patent Application
DRIVING DEVICE AND INFORMATION PROCESSING DEVICE FOR A
DATA STORAGE MEDIUM
By: Masahito NIIKAWA and Hiroaki KUBO
Attorney Docket: 15162/01640

Dear Sir:

Enclosed for filing are the following papers relating to
DRIVING DEVICE AND INFORMATION PROCESSING DEVICE FOR A DATA
STORAGE MEDIUM, Masahito NIIKAWA and Hiroaki KUBO, inventors:

- (1) Specification;
- (2) Executed Declaration and Power of Attorney;
- (3) Formal Drawings (27 sheets);
- (4) Certified Copy of Priority Document;
- (5) Assignment of the invention to Minolta Co., Ltd., with
Recordation Form Cover Sheet;


Assistant Commission for Patents
Box Patent Application
March 17, 2000
Page 2

- (6) Check in the amount of \$816.00 to cover the filing fee of the application; and
- (7) Check in the amount of \$40.00 to cover the assignment recordation fee.

In the event the attached checks in the amounts of \$816.00 and \$40.00 are not received with this correspondence, are not sufficient, or in the event additional fees are due, please charge the required fees (other than issue fee) during the pendency of this application to Deposit Account No. 18-1260. Please credit any overpayment to Deposit Account No. 18-1260.

All correspondence is to be directed to the Applicants' attorney at the Dallas address listed above.

Respectfully submitted,



James W. Williams
Registration No. 20,047
Attorney for Applicants

JWW/tjf

Enclosures

Attorney Docket No.: 15162/01640

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re

U.S. Application of: Masahito NIIKAWA and Hiroaki KUBO
For: DRIVING DEVICE AND INFORMATION
PROCESSING DEVICE FOR A DATA STORAGE
MEDIUM

U.S. Serial No. Not yet assigned

Filed: Concurrently

Group Art Unit: To be determined

Examiner: To be determined

Assistant Commissioner
for Patents
Box Patent Application
Washington, DC 20231

Dear Sir:

Express Mail Mailing Label No.: EL195378566US

Date of Deposit: MARCH 17, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the dated indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

DERRICK T. GORDON

Name of Applicant, Assignee, or Registered Representative

Derrick T. Gordon
Signature

MARCH 17, 2000

Date of Signature

TRANSMITTAL OF PrintEFS PATENT APPLICATION BIBLIOGRAPHIC DATA

Submitted herewith is bibliographic data (2 pages) for the above-identified application, in the PrintEFS Version 1.0.1 program format.

Respectfully submitted,

James W. Williams
James W. Williams
Registration No. 20,047
Attorney for Applicants

JWW/tjf

SIDLEY & AUSTIN
717 N. Harwood
Suite 3400
Dallas, Texas 75201-6507
(214) 981-3328 (direct)
(214) 981-3300 (main)
March 17, 2000

[illegible]

CORRESPONDENCE INFORMATION

APPLICATION INFORMATION

Title Line One:: DRIVING DEVICE AND INFORMATION PROCESSIN
Title Line Two:: G DEVICE FOR A DATA STORAGE MEDIUM
Total Drawing Sheets:: 27
Formal Drawings?: Yes

DRIVING DEVICE AND INFORMATION PROCESSING DEVICE FOR A DATA STORAGE MEDIUM

This application is based on application No. 11-78119 filed in
5 Japan, the content of which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

10 The present invention relates to a driving device and an information processing device for a data storage medium, and more particularly to a driving device and an information processing device which accepts a storage medium such as a memory card, an optical disk or the like.

15 2. Description of Related Art

With development of electronic information devices such as computers, digital cameras, etc., electronic data are newly produced day by day. Such data are finally stored in storage media, and the users have a desire to use a plurality of storage media for various purposes
20 depending on the capacity of the storage medium and the kind of data. Accordingly, storage media are generally compatible with driving devices, and are freely attachable to and detachable from the driving devices.

Meanwhile, since data stored in storage media are electronic, in order to read the data from the storage media, it is necessary to set the
25 storage media in a driving device to read out the data on a display or to set in a printer to print out the data.

displays information on a display section of the storage medium, the information agrees with the content of data stored in the storage medium at all times.

Another object of the present invention is to provide a driving
5 device and an information processing device for a data storage medium which displays information on a display section of the storage medium, the information agrees with the processing of data in the storage medium at all times.

The present invention suggests a driving device which accepts a
10 storage medium comprising a memory section to be stored with data and a display section to display information and records data to the memory section. The driving device comprises: a receiving section where the storage medium is set and ejected, the display section of the storage medium being hidden and not being viewable when the storage medium is
15 set in the receiving section; and a driver which records data to the memory section of the storage medium and renews information displayed on the display section of the storage medium in accordance with the data while the storage medium is set in the receiving section.

When the storage medium is set in the receiving section,
20 information displayed on the display section is renewed in accordance with the content of data recorded to the memory section. When the storage medium is ejected from the receiving section, the display section exactly indicates the content of the memory section. Therefore, even if the user has a plurality of storage media, the user never be confused.

25 Preferably, the display section uses a material with a memory effect, and it is especially preferred to use liquid crystal which exhibits

cholesteric phase in a room temperature. Liquid crystal with a memory effect has advantages of consuming no electric power for maintenance of a display state, which results in energy-saving and of being structured into a display section in a simple process and at low cost.

5 A host device of the driving device according to the present invention is a digital camera, a personal computer, a printer, a scanner or the like. For example, when the host device commands format of the storage medium, the driving device performs format of the storage medium and displays information indicating format on the display section.

10 Thereby, when the storage medium is taken out of the receiving section, the user can recognize that the storage medium has been subjected to format.

 The present invention is effective especially if the host device is a device which processes image data. A storage medium must have a large capacity so as to receive image data, and image data are often
15 transmitted to a storage medium. It is desirable to improve the operability and the efficiency of data searching to make information displayed on the display section agree with the content of the memory section at all times.

20 If the host device is a digital camera, various uses are possible. For example, when data of a photographed image are transmitted from a digital camera, the driving device records the image data to the memory section and simultaneously displays a thumbnail image of the image data on the display section. Also, when the digital camera commands deletion
25 of data of a photographed image, the driving device deletes the data of the designated image and deletes the thumbnail image of the deleted data.

If the host device is a printer, the printer reads out data from the storage medium and prints out the data. In this case, the driving device renews information displayed on the display section on completion of the printing, whereby the user can recognize the data which have been
5 printed out. At this time, it is preferred to display the number of prints.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of the present invention will
10 be apparent from the following description with reference to the accompanying drawings, in which:

Fig. 1 is a sectional view of an exemplary liquid crystal display to be employed in a data storage medium;

Fig. 2 is a plan view which shows a state of forming a columnar
15 structure and a sealant on a substrate of the liquid crystal display;

Fig. 3 is a block diagram showing a driving circuit of the liquid crystal display;

Fig. 4 is an illustration of a driving method of the liquid crystal display;

20 Fig. 5 is a perspective view of a first memory card used for an information processing device according to the present invention;

Fig. 6 is a block diagram showing a circuitry of the memory card;

Fig. 7 is a perspective view of a second memory card;

Fig. 8 is a block diagram showing a circuitry of the memory card
25 shown by Fig. 7;

Fig. 9 is a perspective view of a third memory card;

Fig. 10 is a perspective view of a fourth memory card;

Fig. 11 is a sectional view of the memory card shown by Fig. 10;

Fig. 12 is a block diagram of a circuitry of the memory cards shown by Figs. 9 and 10;

5 Fig. 13 is a block diagram showing a driving circuit of the liquid
crystal display;

Fig. 14 is a front view of a first exemplary digital camera;

Fig. 15 is a rear view of the digital camera;

Fig. 16 is a side view of the digital camera;

10 Fig. 17 is a bottom view of the digital camera;

Fig. 18 is a block diagram showing a control circuit of the digital camera;

Fig. 19 is an illustration showing the state of the liquid crystal display before a format process;

Fig. 20 is an illustration showing an exemplary format of the liquid crystal display;

Fig. 21 is a flowchart showing a control procedure right after power-on of the digital camera;

Fig. 22 is a flowchart showing a control procedure of the liquid
20 crystal display;

Fig. 23 is an illustration of a thumbnail picture on the liquid crystal display;

Fig. 24 is an illustration showing exemplary pictures to be displayed on an LCD section of the digital camera:

25 Fig. 25 is a rear view of a second exemplary digital camera;

Fig. 26 is a bottom view of the digital camera shown by Fig. 25:

Fig. 27 is an illustration showing another exemplary format of the liquid crystal display;

Fig. 28 is a flowchart showing a control procedure of the liquid crystal display in the second exemplary digital camera;

5 Fig. 29 is a flowchart showing a control procedure of the second exemplary digital camera in a photography mode;

Fig. 30 is an illustration of another exemplary picture on the liquid crystal display;

10 Fig. 31 is a flowchart showing a control procedure of the second exemplary digital camera in a reproduction mode;

Fig. 32 is an illustration showing another exemplary picture on the liquid crystal display;

Fig. 33 is a flowchart showing another control procedure of the second exemplary digital camera in the photography mode;

15 Fig. 34 is an illustration showing another exemplary picture on the liquid crystal display;

Fig. 35 is a block diagram showing the structure of a timing controller;

20 Fig. 36 is a front view of a printer which is a host device of a driving system according to the present invention; and

Fig. 37 is an illustration of a picture on the display section of a memory card of which data are printed out by the printer.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25

Some embodiments of a driving device and an information

processing device according to the present invention are described with reference to the accompanying drawings.

General Structure of Memory Card with Memory-effective Liquid Crystal

First, a memory card which is provided with liquid crystal with a memory effect (which will be hereinafter referred to as a memory card with memory-effective liquid crystal) is described. The memory card is based on the PCMCIA type 2 standard, and when the memory card is used, it is inserted in a PCMCIA card slot of a digital camera or a personal computer. The memory card comprises a memory section and a display section. For the memory section, a conventional flash memory is used, and for the display section, a liquid crystal composition which has a memory effect and exhibits a cholesteric phase in a room temperature (which will be hereinafter referred to as cholesteric liquid crystal) is used.

Display Principle of Memory-effective Liquid Crystal

First, a liquid crystal display device used as the display section is described. The liquid crystal display device comprises a liquid crystal display which has cholesteric liquid crystal between substrates and a driving section thereof. Fig. 1 is a sectional structural view of an exemplary liquid crystal display 10.

In Fig. 1, the numerals 11, 12, 13 and 14 are transparent substrates. On the front and back surfaces of these transparent substrates, a plurality of strip-like transparent electrodes 15 and 16 are provided. The electrode strips 15 extend in parallel to one another, and the electrode strips 16 extend in parallel to one another with the extending direction of the electrode strips 15 and the extending direction of the electrode strips 16 perpendicular to each other. In short, the

electrodes 15 and 16 are arranged in a matrix. A voltage is applied to the intersections of the electrodes 15 and 16, and these intersections function as pixels. The numeral 17 is a columnar structure composed of columns which are arranged entirely in the transparent substrates among the
 5 pixels at regular intervals (or maybe at random) (see Fig. 2). The numeral 18 is a cholesteric liquid crystal composition. The numeral 19 is a sealant to seal the liquid crystal composition 18 in the transparent substrates. If necessary, insulating layers and alignment controlling layers may be provided on the transparent electrodes 15 and 16 on the
 10 substrates 11 through 14.

The liquid crystal display 10 has a red display layer R, a green display layer G and a blue display layer B which are placed one upon another in this order on a light absorber 20. The red display layer R makes a display by switching between a red selective reflection state and
 15 a transparent state. The green display layer G makes a display by switching between a green selective reflection state and a transparent state. The blue display layer B makes a display by switching between a blue selective reflection state and a transparent state.

In the liquid crystal display 10, the liquid crystal performs
 20 selective reflection when it is in a planar state and becomes transparent when it is in a focal-conic state. By switching the liquid crystal between these state, the liquid crystal display 10 makes a display. When the liquid crystal is in a planar state, it selectively reflects light of a wavelength $\lambda = Pn$ (P: helical pitch of the cholesteric liquid crystal, n:
 25 average refractive index of the liquid crystal).

If the wavelength of light selectively reflected by the cholesteric

terminals of a scan electrode driving circuit 21, and the data electrodes C1 through Cn are connected to output terminals of a data electrode driving circuit 22.

The scan electrode driving circuit 21 outputs a selective signal to
5 specified ones of the scan electrodes R1 through Rm so as to set the
specified scan electrodes to a selected state while outputting a non-
selective signal to the other scan electrodes so as to set the scan electrodes
come to a non-selected state. The scan electrode driving circuit 21
10 outputs the selective signal to the scan electrodes R1 through Rm in order
while switching at regular intervals. In the meantime, the data
electrode driving circuit 22 outputs a signal in accordance with image
data to the data electrodes C1 through Cn for rewriting of the pixels on
the scan electrodes in a selected state. For example, when a scanning
15 electrode Ra (a : natural number, $a \leq m$) is selected, displayed information
on the pixels LRa-C1 through LRa-Cn at the intersections of the scanning
electrode Ra and the data electrodes C1 through Cn is rewritten. Thus,
in each pixel, the difference between the voltage applied to the scan
electrode and the voltage applied to the data electrode is a rewriting
20 voltage, and each pixel is rewritten in accordance with this rewriting
voltage.

Referring to Fig. 4, displaying an image of which image data are
expressed by a matrix $[P_{ij}]$ composed of m rows and n columns is
described. First, a pulse voltage in accordance with data for the first line
indicated by row vectors $P_{11}, P_{12} \dots P_{1n}$ is applied to the data electrodes
25 C1, C2 ... Cn, while only the scan electrode R1 selected from the scan
electrodes R1 through Rm is charged to a specified voltage. Thereby, the

pixels in the first line, namely, L11, L12 ... L1n come to a planar state or to a focal-conic state. Thereafter, when the application of voltage to the scan electrode Ra is stopped, the display states of the pixels L11, L12 ... L1n are maintained.

5 In the same way, a pulse voltage in accordance with data for the "i"th line indicated by row vectors Pi1, Pi2 ... Pin is applied to the data electrodes C1, C2 ... Cn, while only the scan electrode Ri selected from the scan electrodes R1 through Rm is charged to the specified voltage. Thereby, the pixels in the "i"th line, namely, Li1, Li2 ... Lin come to a
10 planar state or to a focal-conic state. Thereafter, when the application of voltage to the scan electrode Ri is stopped, the display states of the pixels Li1, Li2, ... Lin are maintained. By applying this procedure to all the "i" ($1 \leq i \leq m$) repeatedly, the image [Pij] is completely displayed, and the display state is maintained.

15 By carrying out the above-described matrix drive toward the display layers B, G and R in order or simultaneously, a full-color image can be displayed on the liquid crystal display 10. Further, by driving the liquid crystal with the image data [Pij] changed as time goes by, display of a motion picture is possible.

20 Materials for Liquid Crystal Display and Producing Method Thereof

As the transparent substrates, transparent glass substrates and polymer films can be used. The polymer films mean, for example, resin such as polyether sulfone, polycarbonate, polyethylene terephthalate.

As the electrodes, transparent electrodes such as ITO, NESA coat,
25 etc. are usable, and such a material is formed into the electrodes by sputtering or vapor deposition. The lowermost electrodes may be black

electrodes so as to also function as a light absorber.

As the liquid crystal composition, it is preferred to use a material which exhibits a cholesteric phase in a room temperature. What is suited as the material is chiral nematic liquid crystal which is produced
5 by adding a chiral agent to nematic liquid crystal. Although nematic liquid crystal is not limited to the followings, mixtures mainly containing liquid crystalline tolan compounds, liquid crystalline pyrimidine compounds, liquid crystalline ester compounds, liquid crystalline cyano biphenyl compounds, liquid crystalline phenylcyclohexile compounds,
10 liquid crystalline tarphenyl compounds or mixtures of these compounds can be named as specific examples of nematic liquid crystal. Various coloring agents, e. g. dichroic dyes may be added to the liquid crystal composition.

As the columnar structure, for example, thermoplastic resin is
15 usable. The requirements as the material of the columnar structure are to be softened by heat and hardened by cool, not to chemically react to the liquid crystal material and to have appropriate elasticity. Although the columnar structure serves as a spacer to maintain the gap between the substrates, spherical spacers made of an inorganic material, which are
20 conventionally used, may be also used as well as the columnar structure.

Structure of Memory Card with Memory-effective Liquid Crystal

There are two types of memory cards which have a display section using liquid crystal with a memory effect, namely, a memory section/display section integrated type and a memory section/display
25 section separate type.

Memory Section/Display Section Integrated Type

004750" 9522560

Figs. 5 and 6 show a memory card 40 which is based on the PCMCIA type 2 standard. On a substrate (not shown) in a metal card case 41, flash memories 43, 44, a driving circuit 45 comprising an address decoder, the above-described liquid crystal display 10 and its driving circuits 21 and 22 are arranged. On the liquid crystal display 10, a transparent plastic window 42 is provided. On an end surface of the case 41, a connector 46 of the PCMCIA standard is provided. When this memory card 40 is used, it is fitted in an electronic information device with a connector of the PCMCIA standard, such as a digital camera, a personal computer or the like, in the direction "X".

Electric power is supplied to the memory card 40 from the electronic information device. However, because the display section comprises liquid crystal with a memory effect, even when the memory card 40 is taken out of the electronic information device and is not supplied with electric power, the liquid crystal display 10 is capable of keeping a display thereon. Descriptions of display modes will be given later. The connector 46 functions not only to input and output electric power and a signal to and from the memory section but also to input and output electric power and a drive signal to and from the driving circuits 21 and 22 of the liquid crystal display 10.

Memory Section/Display Section Separate Type

The memory section/display section separate type memory cards can be further divided into two type, namely, an adapter type which permits use of conventional memory cards (without the liquid crystal display 10) and a display section sticking type which facilitates an exchange of liquid crystal displays when the liquid crystal display 10 ages

and degrades.

Adapter Type

Figs. 7 and 8 show a compact flash memory card 50 which is widely used as a data storage medium for a digital camera and a PC card adapter 52 for the memory card 50. The PC card adapter is provided with the above-described liquid crystal display 10. The picture on the display 10 can be seen through a transparent plastic window 53. The memory card 50 is fitted in a frame 54 of the adapter 52 in the direction "X₁". Thereby, a connector 51 connected to the driving circuit 45 comes in contact with a connector 55 provided on the adapter 52. The connector 55 is connected to a connector 46 which is provided on an end surface of the adapter 52. In Figs. 7 and 8, the same members are denoted by the same reference symbols as those in Figs. 5 and 6.

Display Section Sticking Type

As Fig. 9b shows, on a surface of a casing 57 of a compact flash memory card 56, a recess 58 in which a display section is to be placed is formed. In the recess 58, electrodes 59 for a drive of the display section are formed. The liquid crystal display 10 is joined to a support 25 integrally. On the reverse side of the support 25, electrodes 26 which are electrically connected to the driving circuits 21 and 22 are formed. When the center portion of the reverse side of the support 25 is stuck to the recess 58 by a double-side sticky tape or an adhesive, the electrodes 26 and 59 are electrically connected to each other.

The recess 58 has a projection 58a, and the support 25 has a cut-out 25a. In fitting the liquid crystal display 10 in the casing 57, the cut-out 25a must be engaged with the projection 58a, and there is no

possibility that the liquid crystal display 10 may be fitted in a wrong way. The support 25 is slightly smaller than the recess 58. The depth of the recess 58, the thickness of the electrodes 26 and 59, the thickness of the support 25 and the thickness of the display 10 are so designed that the surface of the display 10 will be on a level with the surface of the memory card 56 when the display 10 is fitted in the memory card 56. Therefore, there is no fear that the liquid crystal display 10 may come off when this memory card 56 is fitted in a digital camera or a personal computer. Also, when the display section is to be changed because of aging or damage of the liquid crystal or by any reason, the changing work is easy.

The display section may be inserted in the memory card through a slot. Figs. 10 and 11 show an example of this way of fastening the display section to the memory card. In a casing 61 of a compact flash memory card 60, a slot 62 is provided on the opposite side to the side where the connector 46 is provided. A display section, which comprises a support 27 and the above-described liquid crystal display 10 fitted thereon, is inserted in the memory card 60 through the slot 62. By inserting the display section in the direction "X₁" through the slot 62 to the end, the electrodes 26 of the liquid crystal display 10 are electrically connected to the electrodes 59 (see Fig. 12) provided in the casing 61.

On a surface of the casing 61, a transparent plastic window 63 is provided in a portion where the liquid crystal display 10 is to be placed. Thus, when the display section is inserted in the memory card 60, it can be used as a memory card with memorizable liquid crystal. Further, a lever 64 is provided on the casing 61 so that the display section can be taken out of the slot 62. This take-out mechanism comprising the lever

64 is of a conventional type for a slot of the PCMCIA standard, and a description thereof is omitted.

Fig. 12 shows a circuit of a memory card of the memory section/display section separate type as shown by Figs. 9 and 10. The same members of the circuit shown by Fig. 12 are denoted by the same reference symbols as those in Fig. 6, and descriptions of these members are omitted.

Driving Circuit

Now referring to Fig. 13, a mechanism of displaying the content of image data on the liquid crystal display 10, especially the scan electrode driving circuit 21 and the data electrode driving circuit 22 are described in detail. Fig. 13 shows the members working for a drive of the liquid crystal display 10. Although the flash memories 43 and 44 are actually installed in the memory card, a driving circuit for the memories 43 and 44 is well-known, and a description thereof is omitted.

The memory card with memory-effective liquid crystal is based on the PCMCIA standard which is controlled by a CPU of a digital camera, a personal computer or the like via a card interface. Accordingly, the memory card has four terminals, namely, a data bus, an address bus, a control bus and a power/grounding line although they are not shown. When an image is displayed on the liquid crystal display 10, a CPU of a digital camera, a personal computer or the like dispatches a writing command to the control bus, designates an address and outputs data.

In accordance with the output of data, first, image data for the first line are stored in a line buffer 71. A timing controller 70 times so that on completion of the storage, the image data for the first line can be

read out simultaneously for the respective columns and converted from eight-bit data into analog image signals by D/A converters 72.

From an electric power source of the digital camera or the personal computer, a voltage of +5V is applied to this driving circuit via the memory card interface. In driving the liquid crystal display 10, however, in order to cause the liquid crystal to come to a focal-conic state or a planar state, the voltage difference between the electrodes must be a specified value. Therefore, the voltage is raised to a specified value by a DC/DC converter 73 and then supplied to driving buffers 74. Thereby, the driving buffers 74 amplify the analog image signals sent from the D/A converters 72 and send the amplified signals to the electrode columns C1, C2 ... Cn.

In the meantime, the timing controller 70, at the timing of displaying image data for the first line, sends a command to a decoder 75 to turn on only a switching circuit 76-1 and turn off the other switching circuits. When only the switching circuit 76-1 is turned on, the output of the DC/DC converter 73 is applied to only the electrode row R1. Thereby, only the first line corresponding to the first electrode row becomes a display state in accordance with the image data. Because the liquid crystal has a memory effect, even after stoppage of the application of voltage, the display state is maintained.

In the same manner, in displaying image data for the "i"th line ($1 \leq i \leq m$), in response to a timing signal (column direction), the image data for the "i"th line is stored in the line buffer 71. On completion of the storage, the image data for the "i"th line are read out simultaneously for the respective columns. The eight-bit image data are converted into

analog image signals by the D/A converters 72. The driving buffers 74 amplify the analog image signals outputted from the D/A converters 72, and the amplified signals are sent to the electrode columns C1, C2 ... Cn.

In the meantime, the timing controller 70, at the timing of displaying the image data for the "i"th line, sends a command to the decoder 75 to turn on only a switching circuit 76-i and to turn off the other switching circuits. Accordingly, the output from the DC/DC converter 73 is sent to only the electrode row Ri. Thereby, only the "i"th line corresponding to the electrode row Ri becomes to a display state, and even after stoppage of the application of voltage, the display state is maintained.

Such a driving process is repeated to display a whole picture, and if a command of displaying a new picture is dispatched, the same process is repeated from the first line to the last line to display the picture.

As described above, the data electrode driving circuit 22 comprises the line buffer 71, the D/A converters 72, the driving buffers 74, and the scan electrode driving circuit 21 comprises the timing controller 70, the DC/DC converter 73, the decoder 75 and the switching circuits 76-1 through 76-m. The timing controller 70 and the DC/DC converter 73 may be included in the data electrode driving circuit 22. Further, it is not difficult to structure these circuits 21 and 22 in one tip. Since the liquid crystal display 10 is a full-color display, three channels of such driving circuits 21 and 22 (for R, G and B) are necessary. Actually, therefore, three sets of the data electrode driving circuit 22, the decoder 75, the switching circuits 76-1 through 76-m are provided, and these are controlled by the single timing controller 70.

Incidentally, since such a memory card is an exchangeable storage medium toward electronic information equipment, there are two types with respect to its driving section: a driving section internally installed type which has a driving section inside the memory card itself; and a
5 driving section externally installed type which has part of its driving section which is also used for electronic information equipment is installed outside the memory card.

Driving Section Internally Installed Type

The driving section internally installed type means that the whole
10 driving circuit for the liquid crystal display 10 is installed in the memory card. Accordingly, by receiving only RGB data from outside, the liquid crystal display 10 can make a complete picture thereon. This requires easy control. In a case of using an interface for general use such as the PCMCIA standard as described above, this type must be used.

15 Driving Section Externally Installed Type

The driving section externally installed type means that part of the driving circuit for the liquid crystal display 10 is installed in a device such as a digital camera, a personal computer or the like in which the memory card is to be inserted when it is used. Accordingly, this
20 decreases the size and the cost of the memory card.

In the driving circuit shown by Fig. 13, it is preferred to install the part which is enclosed by a double line in the memory card. The other part can be installed in a digital camera, a personal computer or the like. By installing at least the part enclosed by the double line in the memory
25 card, even if a larger number of electrodes become necessary with an increase in number of the display pixels, the number of pins of the

connector may not be increased so much.

Digital Camera Which can Employ Memory Card with Memory-effective Liquid Crystal

A digital camera which can employ the above-described memory
5 card with memory-effective liquid crystal as a storage medium of photo
data.

Since the memory card has a display section, it is possible to
display any information about the digital camera on the display section of
the memory card. First, however, a type which further has a display
10 section for the digital camera besides the display section of the memory
card is described.

Display Section Separate Type

Structure of Digital Camera

As Figs. 14 through 17, a digital camera 100 comprises a camera
15 body 102 and an image pick-up unit 103. The image pick-up unit 103 is
attached to the right side of the camera body 102 viewed from the front
side and is detachable from the camera body 102.

The image pick-up unit 103 has a conventional CCD 303 which
functions as a color area sensor (see Fig. 18) at a suitable place in the rear
20 side of a zoom lens 301 with a macro function. As in a camera using a
silver salt film, a demodulating circuit 304 with a demodulating sensor
305 which receives reflection of flash light from an object, a distance
sensor 306 which measures the distance to an object and an optical finder
307 are provided at suitable places inside the image pick-up unit 103.

25 In the image pick-up unit 103, also, a zoom motor M1 (see Fig. 18)
which moves the zoom lens 301 for a change in zoom ratio and for

movement between a retreating position and a photography position and a motor M2 which carries out focusing are provided.

On the front side of the camera body 102, a grip 104, a built-in flash 105 and an IRDA port 106 which performs infrared communication
5 between the digital camera 100 and an external device (for example, another digital camera, a personal computer or the like) are provided. On the upper side of the camera body 102, a shutter button 109 is provided.

As Fig. 15 shows, on the rear side of the camera body 102, an LCD
10 section 110 which makes a monitor display (corresponding to a viewfinder) and reproduces a stored image is provided in the center. Below the LCD section 110, a key switch group 111 for control of the digital camera 100 and a power switch 112 are provided. On the left side of the power switch 112, an LED 113 which is lit when the power switch
15 112 is on and an LED 114 which indicates the middle of an access to the memory card are provided.

Further, on the rear side of the camera body 102, a photography/reproduction mode setting switch 120 for switching between a photography mode and a reproduction mode is provided. The
20 photography mode is to take a photograph, and the reproduction mode is to reproduce an image stored in the memory card on the LCD section 110. The photography/reproduction mode setting switch 120 is a two-contact slide switch. For example, by sliding the switch 120 downward, the reproduction mode is set, and by sliding the switch 120 upward, the
25 photography mode is set.

On the rear side of the camera body 102, in the right side, a four-

throw switch is provided. By pressing buttons 121 and 122 of the four-throw switch, the zoom motor M1 is driven for zooming, and by pressing buttons 123 and 124 of the four-throw switch, exposure adjustment is performed.

5 As shown in Fig. 15, on the rear side of the image pick-up unit 103, an LCD button 311 and a macro button 312 are provided. Every time the LCD button 311 is pressed, the LCD section 110 is turned on or off. For example, in taking photographs while using only the optical finder 307, the LCD section 110 shall be turned off to save energy. By pressing the
10 macro button 312, the focus motor M2 is driven to permit macro imaging of the lens 301.

As Fig. 16 shows, on a side of the digital camera 100, a DC input terminal 308 and a video output terminal 309 are provided. The video output terminal 309 is to output an image displayed on the LCD section
15 110 to an external video monitor.

As Fig. 17 shows, on the bottom of the camera body 120, a battery room 131 and a card room 132 for a memory card are provided, and these rooms are closed by a clamshell type cover 130. This digital camera 100 requires four AA batteries which are serially connected as its driving
20 source 135. Further, on the bottom side, a disconnecting lever 136 to disconnect the image pick-up unit 103 and the camera body 102 which are connected by a connector and a hook from each other is provided.

Control Circuit

Next, referring to Fig. 18, a control circuit of the image pick-up
25 unit 103 is described.

The CCD 303 performs photoelectric conversion of an optical

image of an object which has been obtained by the macrozoom lens 30 to output color image signals of R, G and B (signals each of which is composed of rows of pixel data). A timing generator 314 generates various timing pulses for control of the CCD 303.

5 In the image pick-up unit 103, since the stop is fixed, the exposure adjustment is performed by adjusting the exposure of the CCD 303 and more specifically by adjusting the charging time of the CCD 303 corresponding to the shutter speed. When it is impossible to set an appropriate shutter speed because the luminance of the object is low,
10 inappropriate exposure because of lack of exposure is corrected by adjusting the levels of the image signals outputted from the CCD 303. Thus, when the luminance is low, both shutter speed and gain are adjusted for exposure control. The adjustment of the levels of the image signals is carried out by gain control in an AGC circuit in a signal
15 processing circuit 313.

The timing generator 314 generates a driving control signal of the CCD 303 based on a reference clock sent from a timing control circuit 202. For example, the timing generator 314 generates clock signals such as a timing signal for a start/stop of integration (a start/stop of exposure), a
20 pixel data reading control signal (a lateral synchronous signal, a vertical synchronous signal, a transmission signal or the like), etc. and outputs these signals to the CCD 303.

The signal processing circuit 313 performs specified analog signal processing toward each image signal (analog signal) outputted from the
25 CCD 303. This signal processing circuit 313 has a CDS (correlated double sampling) circuit and an AGC (auto gain control) circuit. In the

CDS circuit, the noise of the image signals is reduced, and by controlling the gain in the AGC circuit, the levels of the image signals are adjusted.

The demodulating circuit 304 controls the quantity of light emitted from the built-in flash 105 to emit a quantity of light which is predetermined by a central control section 211. In flash photography, simultaneously with a start of exposure, the sensor 305 starts receiving reflected light from an object irradiated by flash light, and when the quantity of light received by the sensor 305 reaches a specified value, a lighting stop signal is outputted from the demodulating circuit 304. A flash driving circuit 216 stops light emission of the built-in flash 105 in response to the lighting stop signal. Thus, the quantity of light emitted from the flash 105 is controlled.

The image pick-up unit 103 and the camera body 102 are electrically connected to each other by seven connector groups 334a, 334b, 334c, 334d, 334e, 334f and 334g which are provided on the fitting surface 334 of the image pick-up unit 103 and by seven connector groups 234a, 234b, 234c, 234d, 234e, 234f and 234g which are provided on the connecting surface 234 of the camera body 102.

Next, a control circuit of the camera body 102 is described.

In the camera body 102, an A/D converter 205 converts each signal for a pixel of the image signals into a ten-bit digital signal. Based on an A/D/ conversion clock sent from the timing control circuit 202, each pixel signal (analog signal) is converted into a 10-bit digital signal.

The timing control circuit 202 generates a reference clock and clocks to be outputted to the timing generator 314 and the A/D converter 205 and is controlled by the central control section 211.

A black level adjusting circuit 206 adjusts the black level of the A/D converted pixel signal (hereinafter referred to as pixel data) to a specified black level. A WB circuit 207 changes the levels of the pixel data of the respective colors R, G and B so that the white balance will be appropriate after γ correction. The WB circuit 207 uses a level conversion table sent from the central control section 211 in changing the levels of the RGB color pixel data. The conversion coefficients (inclinations of characteristics) for the respective colors in the level conversion table are determined by the central control section 211 for every photography.

A γ correcting circuit 208 is to correct the γ characteristic of pixel data. An image memory 209 is to be stored with pixel data outputted from the γ correcting circuit 208. The image memory 209 has a storage capacity for one-frame data. More specifically, if the CCD 303 has pixels arranged in n columns and in m rows, the image memory 209 has a capacity of pixel data for $n \times m$ pixels, and data for the respective pixels are stored in respective places in the memory 209.

A VRAM 210 is a buffer memory for image data to be reproduced on the LCD section 110. This VRAM 210 has a storage capacity of image data corresponding to the number of pixels of the LCD section 110.

During a stand-by for photography, images are picked up by the image pick-up unit 103 at regular time intervals. Pixel data of each picked-up images are subjected to specified signal processing by the A/D/converter 205 through the γ correcting circuit 208 and stored in the image memory 209. Simultaneously, the data are transmitted to the VRAM 210 via the central control section 211 to be displayed on the LCD

section 110 (display of a live view image). From the image displayed on the LCD section 110, the user can obtain a vision of the object. In the reproduction mode, image data read out from the memory card are subjected to specified signal processing at the central control section 211,
5 and the data are transmitted to the VRAN 210 to be displayed on the LCD section 110.

A card I/F 212 is an interface for recording and reading of image data to and from the memory card.

The flash driving circuit 216 is to control light emission of the
10 built-in flash 105. This driving circuit 216 controls the necessity of light emission of the built-in flash 105, the quantity of light to be emitted, the timing of light emission, etc. based on a control signal sent from the central control section 211, and the quantity of emitted light is controlled specifically based on the light emission stop signal sent from the
15 demodulating circuit 304. An RTC 219 is a clock circuit which manages the date and time of photography and is driven by another electric power source (not shown). An operation section 250 means the above-described various keys, switches and buttons.

Incidentally, the shutter button 109 is, like one employed in a
20 camera using a silver-salt film, a two-level switch which has a half-pressed state S1 and a full-pressed state S2. During a stand-by, when the shutter button 109 is pressed half (S1), distance information detected by the distance sensor 306 is inputted to the central control section 211. The central control section 211 drives the AF motor M2 based on this
25 distance information to move the zoom lens 301 for focusing.

The central control section 211 is a CPU to organize photography

operation of the digital camera 100 by integrally controlling drives of the members in the image pick-up unit 103 and in the camera body 102. The central control section 211 is connected to the peripheral circuits by address buses, data buses and control buses. In Fig. 18, the arrows are
5 used for convenience to show the flows of signals and image data. Actually, image data are sent to the respective circuits via the central control circuit 211, and therefore, the central control section 211 is provided with a ROM (not shown) to be stored with a work memory and a program.

10 Also, the central control section 211 has a luminance judging section and a shutter speed setting section to determine the exposure value (shutter speed). The luminance judging section judges the brightness of an object using images picked up by the CCD 303 at intervals of 1/30 second during a stand by for photography. In other
15 words, the luminance judging section judges the brightness of an object using image data which are renewably stored in the image memory 209. The shutter speed setting section sets a shutter speed (integrated time of the CCD 303) based on the judgment of the luminance judging section.

20 Further, the central control section 211 has a filter section which performs a filtering treatment for recording of a photographed image, an image recording section which produces a thumbnail image and a compressed image and an image reproducing section which reproduces an image to be displayed on the LCD section 110 from data stored in the memory card.

25 The filter section adjusts the high-frequency component of an image to be recorded by a digital filter so as to correct the picture quality

with respect to the outline.

The image recording section reads pixel data from the image memory 209 and produces a thumbnail image and a compressed image to be stored in the memory card. The image recording section reads data of every eight pixels in the horizontal direction and in the vertical direction while scanning the image memory 209 in a raster scanning direction and transmits the pixel data to the memory card in order, whereby a thumbnail image is produced and recorded in the memory card.

The image recording section reads all the pixel data of one image from the image memory 209 and performs two-dimensional DCT conversion and a compression treatment based on a JPEG method, such as a Huffman encoding method, toward the pixel data to produce data for a compressed image. Then, the compressed image data are recorded in an image area of the memory card.

In the photography mode, when the shutter button 109 is pressed for a command of photography, the central control section 211 processes the image which has been photographed and taken in the image memory 209 to a thumbnail image and a compressed image by applying a compression treatment based on the JPEG method at a ratio set by a compression ratio setting switch. Then, the compressed image is stored in the memory card with tag information about the photographed image (frame number, exposure value, shutter speed, compression ratio, date of photography, on/off of the flash, scene information, result of judgment of the image, etc.).

In each frame of the digital camera 100, tag data, high-resolution image data compressed based on the JPEG method (1600×1200 pixels)

and thumbnail image data (80×60 pixels) are recorded. The volume of data recorded in one frame is approximately 1MB.

When the photography/reproduction mode setting switch 120 is set to the reproduction mode, image data in the frame of the highest number are read out of the image memory, and the data are expanded by the image reproducing section. Then, the expanded data are transmitted to the VRAM 210, whereby the image in the frame of the highest number, that is, the latest photographed image is displayed on the LCD section 110. By operating an UP switch 111a, an image in the higher frame number is displayed, and by operating a DOWN switch 111b, an image in the lower frame number is displayed.

Display Sequence of Liquid Crystal Display

An exemplary sequence of displaying data on the liquid crystal display 10 of a display section separate type digital camera is described.

(1) Renewal of Image on Card

The memory card 56 shown by Fig. 9 which is of a memory section/display section separate type and of a driving section internally installed type is shown by Figs. 19 and 20 again and is described as an exemplary memory card fitted in the digital camera 100. As mentioned above, the memory card 56 is compatible with conventional ordinary memory cards. The liquid crystal display 10 comprises 300 pixels in each row and 400 pixels in each column, and the electrodes 15 and 16 are formed in accordance with the arrangement of the pixels.

Such memory cards 56 in a non-display state are distributed to users (see Fig. 19). In the control procedure described below, after a user fits the memory card 56 in the digital camera 100, a thumbnail picture

on the liquid crystal display 10 is renewed every time a photograph is taken.

Fig. 21 is a flowchart of the control procedure. When the digital camera 100 is turned on, first at step S10, the presence or absence of a memory card in the camera 100 is judged. If there is no card, a warning is displayed at step S11. If there is a card, it is judged at step S12 whether or not the card is a memory card with memory-effective liquid crystal. This judgment is made from the attribute (data stored in a specified address) of the card. If there is no card in the camera 100 or if there is a conventional memory card in the camera 100 ("NO" at step S12), ordinary processes of a conventional digital camera are carried out at step S13. When a memory card with memory-effective liquid crystal is fitted in the digital camera, it is judged at step S14 whether or not a format for a digital camera is necessary.

If a format is necessary, a format process is performed at step S15. At step S15, a format process is started after the user's confirmation, and during the format process, the central control section 211 performs writing on the liquid crystal display 10 via the card I/F 212. After completion of the format process, a framework 80 for thumbnail images, the number of photographed frames 82 and the remaining capacity of the card 83 are displayed on the liquid crystal display 10. A thumbnail image of one frame is of a size of 80×60 mm, and a space for display of information must be set in the periphery. Accordingly, thumbnail images of 16 frames can be displayed. Further, depending on the frame size of the digital camera and the capacity of the memory card, more than 16 photographs can be taken. In this case, thumbnail images of all the

frames are displayed by reducing the size of each image, or only thumbnail images of the latest used 16 frames are displayed.

If a format process is unnecessary ("NO" at step S14), a flag is checked at step S16 to judge whether or not the digital camera 100 is in a state right after the memory card with memory-effective liquid crystal has been fitted therein. This flag is 0 while there is no memory card in the digital camera 100. When a memory card is fitted in the digital camera 100, the flag is set to 1. Accordingly, by checking the state of this flag, the presence or absence of a memory card in the digital camera 100 can be judged.

Right after fitting of a memory card in the digital camera 100, there is a possibility that the picture on the liquid crystal display may be out of order, and therefore, although photography has not been performed yet, the picture on the liquid crystal display is renewed at step S17. More specifically, thumbnail images are read out from the memory card and displayed. Thereafter, the liquid crystal display is controlled at step S18.

Referring to Fig. 22, a liquid crystal display control procedure performed at step S18 is described. First at step S21, the mode of the camera is judged. If the photography mode is set, processes at steps S22 through S24 are performed. It is judged at step S22 whether or not the shutter button 109 has been fully pressed, that is, has come to the state S2. When the shutter button 109 has been fully pressed, at step S23, image data processing of a photographed image is performed, and the data are recorded into a flash memory of the memory card 56. At step S24, the thumbnail picture on the liquid crystal display 10 is renewed.

More specifically, as Fig. 23 shows, thumbnail images 85 and frame numbers of photographed images are displayed in the respective display sections for the frames. Simultaneously, the number of used frames 82 and the remaining capacity 83 of the memory card 56 are renewed. Then,
5 other processes in the photography mode are carried out at step S25, and the program goes to step S33.

In the liquid crystal display 10, as described above, the data electrode driving circuit 22 drives the data electrodes which extend in the column direction, and therefore, data are written row by row.
10 Accordingly, addition of a thumbnail image is made in the column direction as shown by arrow "Y" in Fig. 23. If a thumbnail image is added in the row direction (perpendicular to the direction of arrow "Y"), for example, when a thumbnail image of the second frame is to be added, the thumbnail image of the first frame must be written again, which
15 requires more time for renewal.

If the data electrode driving circuit 22 of the liquid crystal display 10 drives the data electrodes which extend in the row direction, addition of a thumbnail image shall be made in the row direction. In short, addition of a thumbnail image shall be made in a direction parallel to the
20 extending direction of the data electrodes driven by the data electrode driving circuit 22.

In the reproduction mode, in the LCD section 110 of the camera 100, simultaneous display of all the photographed images, format of the memory card, deletion of a specified image are possible. Fig. 24 shows
25 main pictures changeably displayed on the LCD section 110 in the reproduction mode. Right after a mode change from the photography

mode to the reproduction mode, the photographed image of the highest frame number is displayed, and then, by operating the operation key 111, the picture is changed to a menu selection picture D1.

On the picture D1, four modes shown in Fig. 24 are available, and these modes can be selected cyclicly by pressing the buttons 123 and 124 of the four-throw switch. When an execute key 111d is pressed with "memory card format" selected in the picture D1, a picture D2, which shows that a format process is being performed, appears. On completion of the format of the memory card, the display returns to the picture D1.

When the execution key 111d is pressed with "photo data deletion" selected in the picture D1, a picture D3, which shows all the photographed images, appears. In this state, by operating the four-throw key 121 through 124, a specified image can be selected, and the selected image is enclosed by a frame 90. Then, by pressing the key 111d, the data of the selected image are deleted. When a return key 111f is pressed, the display returns to the picture D1.

Referring to Fig. 22 again, this operation is described. It is judged at step S26 whether or not format of the memory card has been commanded. When the format is designated and commanded, a format process of the memory card is performed at step S27. Next, the picture on the liquid crystal display 10 is renewed at step S28, and more specifically, all the thumbnail images are erased.

When deletion of a photographed image is commanded ("YES" at step S29), data of the designated frame are deleted at step S30, and the thumbnail picture on the display 10 is renewed at step S31. More specifically, if data of the "n"th frame are deleted, image data of the

“n+1”th frame is restored as image data of the “n”th frame, and the thumbnail image of this frame is displayed in the section for the “n”th frame. These processes are performed to all the image data of the “n+1”th and subsequent frames. At step S32, other processes in the reproduction mode are carried out, and the program goes to step S33.

At steps S33 through S35, electric power is shut off. It is judged at step S33 whether or not a command of power-off has been issued by operation of the power switch 112. If power-off has not been commanded, the program returns to the main routine. If power-off has been commanded, completion of renewal of the thumbnail picture is waited at step S34, and a power-off process is performed at step S35. Thereby, there is no trouble that power may be turned off in the middle of renewal of the thumbnail picture.

Display Section Commonly Used Type

Since the memory card according to the present invention has a liquid crystal display section, it is possible to display not only the content of the memory card but also information about a digital camera on the display section. In the following, a digital camera 100' which commonly uses a display section of a memory card is described. Figs. 14 and 16 are also a front view and a side view of this camera 100'. Figs. 25 and 26 are a rear view and a bottom view of the digital camera 100', respectively. The same members are denoted by the same reference symbols as shown in Figs. 14 through 17, and repetition of descriptions of these members is omitted. Although a case of using the memory card shown by Fig. 9 will be described, needless to say, memory cards of other types can be used.

Referring to Figs 25 and 26, on a display support 140 provided on

the rear side of the camera body 102, a card slot 141 and a connector 142 for the memory card 56 are provided. The memory card 56 is inserted in the camera 100' through the lower side of the display support 140. On the rear side of the display support 140, in a place facing the liquid crystal display 10 of the memory card 56, a window 143 is formed. Thereby, when the memory card 56 is inserted, the screen of the liquid crystal display 10 can be seen, and in this state, the liquid crystal display 10 can be also used as a display section of the camera 100'.

Further, the digital camera 100' has, in the camera body 102, an LCD section 110 using conventional TFT liquid crystal which emits light from a back light. Because the renewal speed of the liquid crystal display 10 is relatively low, the LCD section 110 is exclusively used to display a motion picture. By pressing the LCD button 311, the LCD section 110 can be turned on and off. If low-speed renewal of a motion picture is permissible, the LCD section 110 is not always necessary. If the LCD section 110 is not provided, the LCD button 311 is unnecessary.

An operation sequence in a case of using the liquid crystal display 10 of the memory card 56 as a display section of a camera is described.

(1) Case of Not Providing LCD Section 110

In this case, from the control circuit shown by Fig. 18, the VRAM 210, the LCD section 110 and the back light 160 are omitted. The omission of the back light 160 especially reduces the consumption of electric power, which prolongs the lives of the batteries.

Processes after power-on are performed in a similar way to the flowchart shown by Fig. 21. However, since a display section is not provided, the warning display of indicating no card at step S11 is made by

can be changed. By pressing a key 111f right under the label 90, the size of a live view display area can be changed.

The live view display area is changeable between a small size 91 and a large size 92. When the display area is small, the number of pixels
5 used for a display, and it is not necessary to rewrite a large area, which shortens the time for renewal of the image on the liquid crystal display 10. On the other hand, when the display area is large, although it takes a longer time for renewal, the details of the object can be recognized because the number of used pixels is large. In this way, by changing the
10 size of the live view display area depending on the purpose, both the efficiency and the visibility can be satisfied.

Referring back to Fig. 29, it is judged at step S62 whether or not the shutter button 109 is in the half-pressed state S1. If the button 109 is not in the state S1, it is judged at step S63 whether or not the liquid
15 crystal display 10 is in the middle of image writing. If not, it is judged at step S71 whether or not any other key is operated. If there is no operation of keys, the central control section 211 commands supply of electric power to the image pick-up unit 103 at step S73 and commands pick-up of a live view image at step S74. Thereafter, image data are
20 stored in the image memory 209 at step S75, and on completion of the storage of image data, the power supply to the image pick-up unit 103 is shut off at step S76. Next, at step S77, in accordance with the image data stored in the image memory 209, writing of a live view image on the liquid crystal display 10 is started. Then, the program returns to step
25 S62.

After completion of the writing, as long as operation of no keys

On the other hand, if the shutter button 109 does not come to the state S2 ("NO" at step S66), it is judged at step S67 whether or not the shutter button 109 is in the state S1. If the shutter button 109 is in the state S1, the program returns to step S65. If the shutter button 109 is not in the state S1, the power supply to the image pick-up unit 103 is shut off at step S70, and the program goes to step S71.

Although operations of keys are not received during image writing on the liquid crystal display 10, only when the shutter button 109 is in the state S1, operations of keys are received. Therefore, the user never misses a shutter chance.

When an operation of any other key is recognized at step S71, a process in compliance of the operation of the key is performed at step S72. For example, when a mode change to the reproduction mode is commanded, a reproduction mode process, which will be described below, is performed.

Now referring to Fig. 31, a control procedure in the reproduction mode is described. First at step S81, it is judged whether or not a mode change from the photography mode has been made. If the change has been made, a timer T1, which is used to judge whether the camera 100' has not been operated for a specified time, is reset at step S82. Then, at steps S83 through S85, the picture on the liquid crystal display 10 is changed to one for the reproduction mode.

Specifically, at step S83, image data of the highest frame number is read out of the flash memory of the memory card 56, and the image is displayed at step S84. Here, the picture shown by Fig. 32 is displayed. In Fig. 32, the same reference symbols as used in Fig. 30 show the same

items. What are newly displayed are a label 94 for deletion and a label 95 for one-frame display. The key 111d right under this label 94 functions as a delete key. The key 111e right under the label 95 functions as a one-frame display/thumbnail display switching key. In the portion denoted by the numeral 87, the status of the camera 100' is displayed; however, the file name of the displayed image, the date and time of photography, etc. may be also displayed in the portion 87 if necessary. The numerals 91 and 92 denote areas where a photographed image can be displayed. By pressing the key 111f right under the label 90, the size of the display area can be changed as in the photography mode.

Thus, because the content of the display for the photography mode and the content of the display for the reproduction mode overlap (the number of used frames 82, the remaining capacity 83, etc.), at the time of a mode change, the picture on the liquid crystal display 10 does not have to be wholly changed, which saves time for renewal.

Referring back to Fig. 31, at step S85, the information of the image displayed on the liquid crystal display 10 is temporarily saved in the work memory of the central control section 211. The reason will be described later. The format for the temporary saving is as follows:

codes to be displayed on the status line: file number, date and time of photography, etc.

frame number: frame number currently displayed

states of the keys: the content of 94, 95 and 90

Next, it is judged at step S86 whether or not a change of displayed frame has been commanded, and the timer T1 is reset at step S87. The

frame change is made in the following way: when the button 121 of the four-throw switch is pressed, the liquid crystal display 10 takes in image data of the frame of one lower number and displays the image; and when the button 122 is pressed, the liquid crystal display 10 takes in image data of the frame of one higher number and displays the image. In short, at steps S88 and S89, image data are taken into the liquid crystal display 10, and the picture on the display 10 is renewed. At step S90, the information of the displayed image is saved in the work memory.

Next, it is judged at step S91 whether or not a change of the display area size has been commanded. When the change is commanded, the timer T1 is reset at step S92. Then, image data of the frame are taken into the liquid crystal display 10 again at step S93, and at step S94, the image is displayed in the area of the designated size. Subsequently, at step S95, the information of the displayed image is saved in the work memory.

Further, if an operation of any other key is recognized at step S96, the timer T1 is reset at step S97, and a process in compliance with the operation of the key is performed. If necessary, the picture on the liquid crystal display 10 is renewed, and the information is saved. Then, the program returns to the main routine.

On the other hand, if "NO" at step S96, that is, when no keys are operated, the timer T1 counts up at step S99. After it is judged at step S100 from the count-up of the timer T1 that the camera 100' has not been operated for a specified time (for example, five minutes), the information of the currently displayed image is read out of the work memory at step S101. Then, the image indicated by the information is displayed again

on the liquid crystal display 10 at step S102, and the timer T1 is reset at step S103.

The picture on the liquid crystal display 10 is renewed at step S102 because of the following reason. Cholesteric liquid crystal used in this embodiment has an advantage of not consuming electric power while maintaining a display thereon. Accordingly, while no operation is made to the liquid crystal display 10, the same picture is continuously displayed. If any external stress is applied to the display 10 during the time, the state of the liquid crystal may partly change and may cause deformation of the displayed picture. In order to avoid this trouble, at regular time intervals, for example, every five minutes, the picture on the display 10 is renewed.

Operations to be recognized at steps S96 and S100 includes a change from the reproduction mode to the photography mode. The mode change is performed at step S98, and in this time, the work memory is cleared.

(2) Case of Providing Display Section 110

In this case, in the photography mode, a live view image is displayed on the display section 110 which employs conventional TFT liquid crystal and a back light. In the reproduction mode, control is carried out following the procedure shown by Fig. 31. The control procedure in the photography mode is shown by Fig. 33.

When a mode change from the reproduction mode to the photography mode is made, first at step S111, the picture on the liquid crystal display 10 is renewed, and a thumbnail picture is displayed thereon as shown by Fig. 34. Like the thumbnail picture shown by Fig.

23, every time a photograph is taken, a thumbnail image of the photographed image is added to this thumbnail picture. In Fig. 34, the parts with the same functions as those in Figs. 23 and 30 are denoted by the same reference symbols, and description of these parts are omitted.

5 Since in the photography mode, a live view image is displayed on the display section 110 which is TFT liquid crystal with a back light, the image pick-up unit 103 is turned on at step S112, and live view images are taken in and displayed at regular time intervals. The image pick-up is described in more detail. It is judged at step S113 whether or not the
10 shutter button 109 is in the half-pressed state S1. If the shutter button 109 is not in the state S1 and if operation of any other key (for example, a mode change to the reproduction mode) is recognized at step S119, a process in compliance with the operation of the key is performed at step S120. Then, the program returns to the main routine.

15 If no other keys are operated ("NO" at step S119), a command for pick-up of a live view image is issued at step S121. Data of the live view image are taken into the image memory 209 at step S122, and the image is displayed on the LCD section 110 at step S123. Then, the program returns to step S113.

20 When "YES" at step S113, that is, when the shutter button 109 is in the state S1, an AF process and an AE process are performed at step S114. Thereafter, when the shutter button 109 is judged to come to the full-pressed state S2 at step S115, data of the photographed image are taken in and processed at step S116, and the image data are stored in the
25 flash memory of the memory card 56. Next, a thumbnail image of the photographed image is displayed on the liquid crystal display 10 at step

S118.

Error Management

In using a memory card with memory-effective liquid crystal, as in using a conventional memory card, there is a possibility that recording
5 and reading of data to and from the flash memory may become impossible by any reason. The following table shows probable errors and the causes.

Because the memory card according to this embodiment has a liquid crystal display with a memory effect, it is possible to display an
10 error code on the display to inform the user of the kind of the error. Further, it is possible to display the cause and the measures as well as the error code.

Table 1

15

Error Code	Kind of Error	Cause
1	error of data recording to memory card 1	damage on flash memory
2	Error of data recording to memory card 2	over capacity
3	error of data reading from memory card 1	damage on flash memory
4	error of data reading from memory card 2	theoretical disorder made in data recording
5	Non-operational	central control section beyond control, removal of memory card during an access

0047E0" 95E82560

In order to manage these errors, as Fig. 35 shows, the timing controller 70 of the memory card according to this embodiment comprises a timing signal generating section 701, an error detecting section 702, and error display data 703, a capacitor 704 and a memory managing section 705.

Error of Data Recording to Memory Card 1

The timing signal generating section 701 performs display on the liquid crystal display 10 and data recording to the flash memory controlled by the central control section 211. When data are recorded in the flash memory, the central control section 211 checks whether or not specified data are correctly recorded to the flash memory. If the central control section 211 recognizes disorder during the check, the central control section 211 sends information of an occurrence of the recording error 1 to the error detecting section 702 via the timing signal generating section 701. In response, the error detecting section 702 selects a piece of display data corresponding to the error code 1 from the error display data 703 and sends the display data to the timing signal generating section 701. Then, the display data are displayed in an appropriate place on the liquid crystal display 10.

Error of Data Recording to Memory Card 2

The memory managing section 705 has a memory which is stored with data about the remaining capacity and the number of used frames. The central control section 211 records 1024 bits of data at a time when recording data to the flash memory. When the remaining capacity of the flash memory becomes smaller than 1024 bits, the central control section 211 sends information of an occurrence of the recording error 2 to the

from the error display data 703 and sends the display data to the timing generating section 701. Then, the data are displayed in an appropriate place on the liquid crystal display 10.

Non-operational

5 The above-described error check processes are installed in the internal routine of the central control section 211. If the central control section 211 itself comes beyond control and stops (the system may be so designed to shut the power off in such a case for protection of the system), the error check processes are not operative. The same thing happens
10 when the memory card is taken out of the camera during an access.

 In order to manage such a case, the memory card has a capacitor 704 with a capacity of approximately $300\ \mu\text{F}$. If the central control section 211 comes beyond control, an error display is made by use of electricity stored in the capacitor 704.

15 The error detecting section 702 monitors signals exchanged between the central control section 211 and the timing signal producing section 701 via a control bus. If the timing clock stops or if a memory access signal stops suddenly whereas the timing clock works, it is judged that the central control section 211 comes beyond control or that the
20 memory card is taken out during an access. Accordingly, the error detecting section 702 selects a piece of display data corresponding to the error code 5 from the error display data and sends the display data to the timing signal generating section 701. Then, the data are displayed in an appropriate place on the liquid crystal display 10.

25 Thus, because the liquid crystal display 10 has a memory effect, an error display can be made even when the power is off. This brings an

effect that the system can be protected while an error is managed.

Printer

Next, a printer for printing out data from a memory card is described. Fig. 36 shows the printer 300, and Fig. 37 shows the picture
5 on the display 10 of the memory card 56 while the printer 300 is printing out the data from the memory card 56.

The printer 300 is to read out and print out image data from a memory card (Fig. 37 shows the memory card 56 as an example) which is stored with data of images photographed by the digital cameras 100 and
10 100'. A memory card drive 310 which has a slot 311 for a memory card is built in the printer 300. On a front side of the printer 300, frame setting buttons 321, a frame number indicator 322, print number setting buttons 323 and a print number indicator 324 are provided. The numeral 325 is an outlet of prints, and the numeral 326 is a print start button. The
15 mechanism for printing out data is of a conventional type, and a description thereof is omitted.

The memory card 56 is set in the slot 311 of the drive 310. Thereafter, the frame number to be printed and the number of prints are designated by using the buttons 321 and 323, respectively. Then, when
20 the print start button 326 is pressed, image data of the designated frame are printed out. When the printing is completed normally, the number of prints 84 is displayed on the liquid crystal display 10 of the memory card 56, in the area displaying the image of the corresponding frame number. Otherwise, merely a dot 84' may be displayed in the area so as to indicate
25 that the image has been printed.

Other Embodiments

In the embodiments above, memory cards are described as examples of storage media. It is, however, possible to provide a liquid crystal display on a surface of an electromagnetic disk or on a surface of a floppy disk. Also, a plurality of liquid crystal displays can be provided on
5 one storage medium.

As the display section, various materials can be used. For example, ferroelectric liquid crystal is usable. The host device may be an image scanner. Also, the driving device for a storage medium may be structured separately from the host device and may be connected to a
10 digital camera or a printer by a cable.

Although the present invention has been described in connection with the preferred embodiments, it is to be noted that various changes and modifications are possible to those who are skilled in the art. Such changes and modifications are to be understood as being within the scope
15 of the present invention.

WHAT IS CLAIMED IS:

1. A driving device which accepts a storage medium comprising a memory section to be stored with data and a display section to display information and records data to the memory section, said driving device comprising:
- a receiving section where the storage medium is set and ejected, the display section of the storage medium being hidden and not being viewable when the storage medium is set in the receiving section; and
- a driver which records data to the memory section of the storage medium and renews information displayed on the display section of the storage medium in accordance with the data while the storage medium is set in the receiving section.
2. The driving device according to claim 1, further comprising:
- a power supply section which supplies electric power to the display section of the storage medium which is set in the receiving section so that information on the display section can be renewed by the driver.
3. The driving device according to claim 2, wherein the display section uses a material with a memory effect.
4. The driving device according to claim 1, wherein the display section uses a material with a memory effect.
5. The driving device according to claim 4, wherein the material is

liquid crystal which exhibits a cholesteric phase in a room temperature.

6. An information processing device which accepts a storage medium comprising a memory section to be stored with data and a display section to display information and records data to the memory section, said information processing device comprising:

a receiving section where the storage medium is set and ejected, the display section of the storage medium being hidden and not being viewable when the storage medium is set in the receiving section;

10 a data processing section which processes data; and

a driver which records data processed by the data processing section to the memory section of the storage medium and renews information displayed on the display section of the storage medium in accordance with the data while the storage medium is set in the receiving section.

7. The information processing device according to claim 6, further comprising:

20 a power supply section which supplies electric power to the display section of the storage medium which is set in the receiving section so that information on the display section can be renewed by the driver.

8. The information processing device according to claim 7, wherein the display section uses a material with a memory effect.

25

9. The information processing device according to claim 6, wherein

the display section uses a material with a memory effect.

10. The information processing device according to claim 8, wherein
the material is liquid crystal which exhibits cholesteric phase in a room
5 temperature.

11. The information processing device according to claim 6, wherein
the data processing section processes image data.

10 12. The information processing device according to claim 11, wherein
the data processing section has an image pick-up unit which picks up an
image of an object by use of an image sensor and produces image data.

13. The information processing device according to claim 11, wherein
15 the driver records image data to the memory section and writes a
thumbnail image of the image data on the display section.

14. The information processing device according to claim 13, wherein
the driver deletes image data stored in the memory section and deletes a
20 thumbnail image of the deleted image data from information on the
display section.

15. The information processing device according to claim 6, wherein
the driver performs format of the memory section.
25

16. The information processing device according to claim 15, wherein

the driver changes information on the display section in accordance with the format to a piece of information indicating format.

17. The information processing device according to claim 6, which is a
5 printer.

18. The information processing device according to claim 17, wherein
the driver renews information on the display section on completion of
printing.

19. The information processing device according to claim 18, wherein
the driver renews information displayed on the display section about the
number of prints on completion of printing.

20. An information processing system comprising:
a storage medium which has a memory section to be stored with
data and a display section to display information; and
an information processing device where the storage medium is set
to be accessed by the information processing device and is ejected, the
display section of the storage medium being hidden and not being
viewable while the storage medium is set in the information processing
device;

wherein the information processing device comprises:
a data processing unit which processes data; and
25 a driver which records data processed by the data processing unit
to the memory section of the storage medium and renews information on

the display section of the storage medium in accordance with the data.

21. The information processing system according to claim 20, wherein
the information processing device further comprises a power supply
5 section which supplies electric power to the display section of the storage
medium so that the driver can renew information on the display section.

22. The information processing system according to claim 21, wherein
the display section uses a material with a memory effect.
10

23. The information processing system according to claim 20, wherein
the display section uses a material with a memory effect.

24. The information processing system according to claim 23, wherein
15 the material is liquid crystal which exhibits a cholesteric phase in a room
temperature.

25. The information processing system according to claim 20, wherein
the information processing device processes image data.
20

26. The information processing system according to claim 25, wherein
the information processing device comprises an image pick-up unit which
picks up an image of an object by use of an image sensor and produces
image data.
25


27. The information processing system according to claim 25, wherein

the driver records image data to the memory section and writes a thumbnail image of the image data on the display section.


ABSTRACT OF THE DISCLOSURE

A driving device for a memory card with a liquid crystal display which uses a material with a memory effect. A digital camera is an
5 example of such a driving device. When the driving device receives data of a photographed image from a camera body, the image data are recorded to a flash memory of the memory card, and simultaneously a thumbnail image of the image data is displayed on the liquid crystal display.


F / G. 1

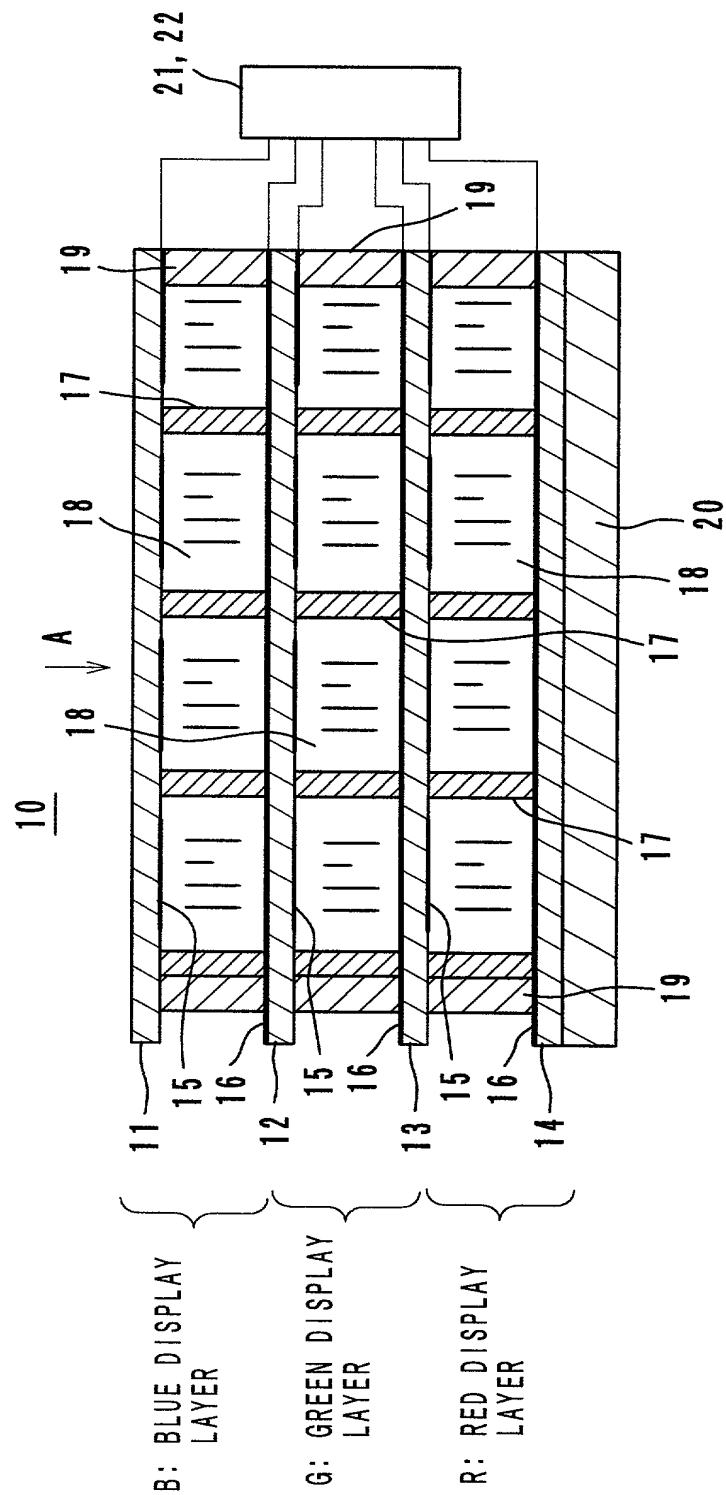

F I G . 2

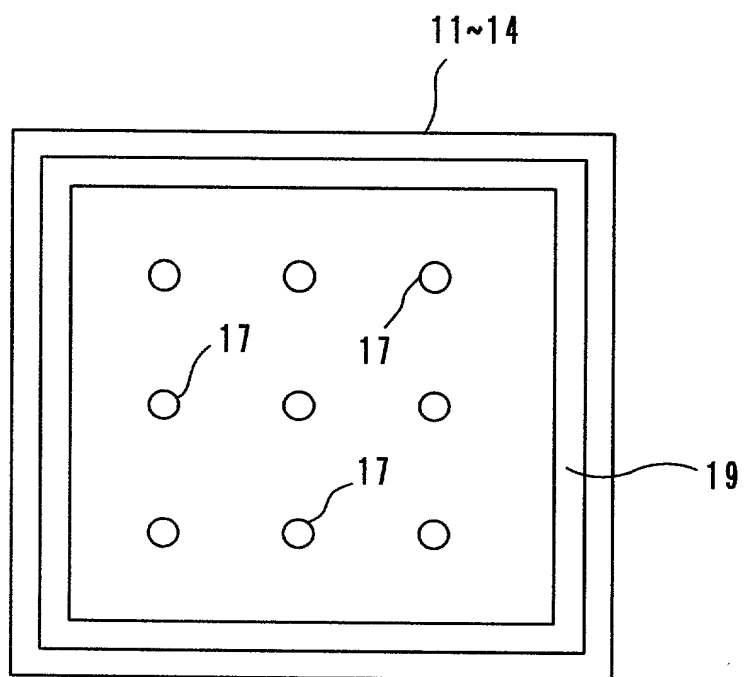

F / G . 3

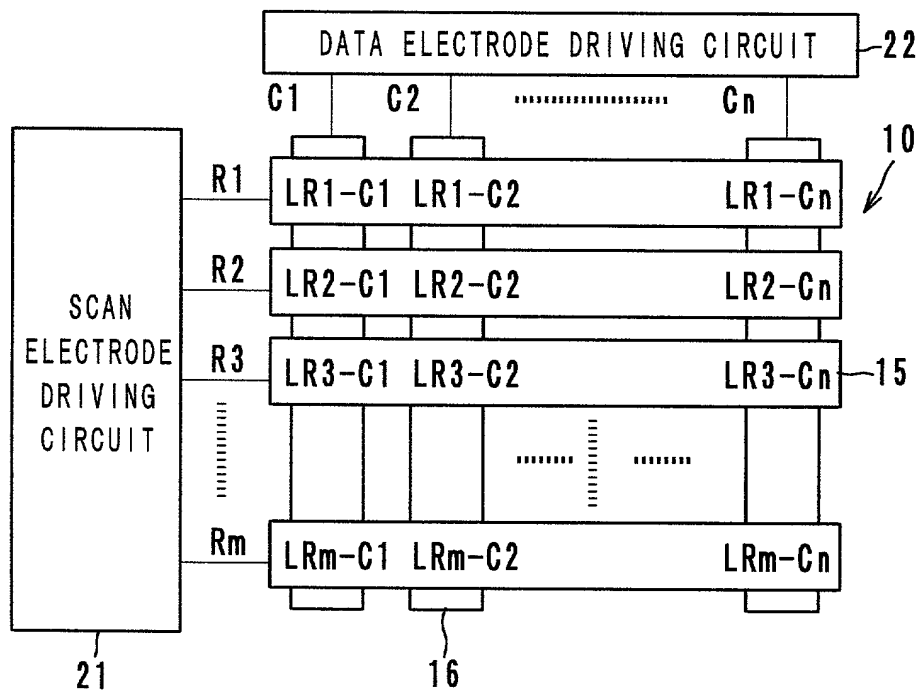


F / G . 4

→ ROW

P11	P12		P1n
P21	P22		P2n
P31	P32		P3n
		Pij	
Pm1	Pm2		Pmn

↓ COLUMN

F / G. 5

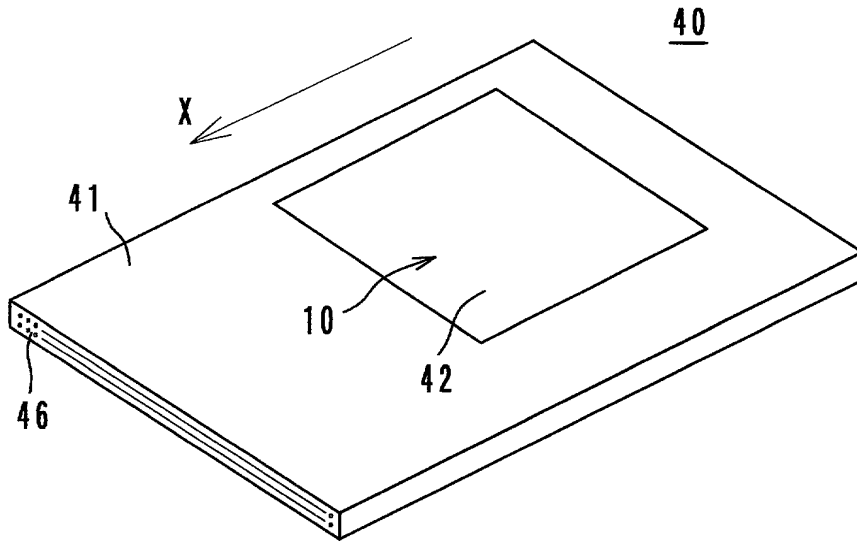

F / G. 6

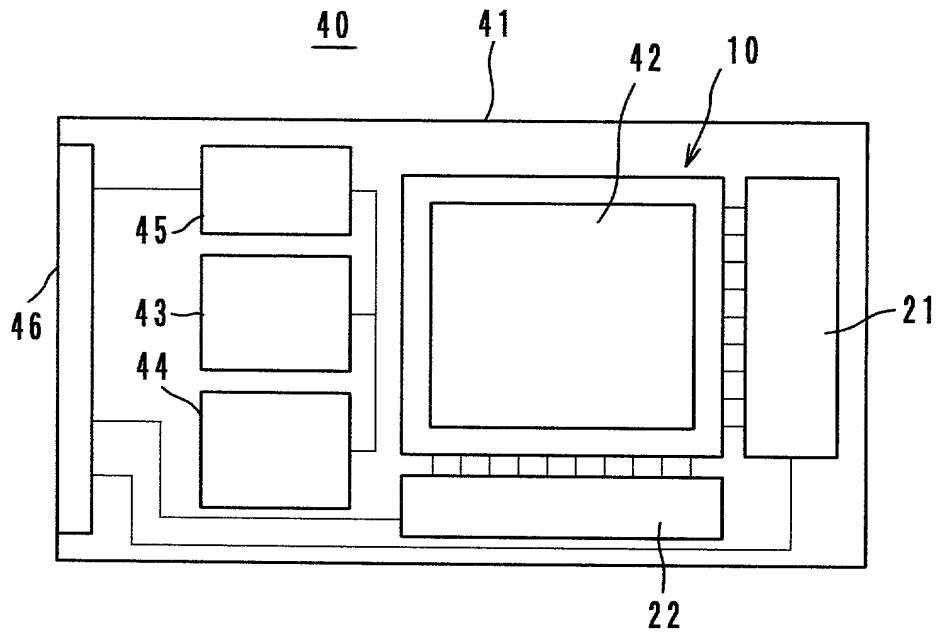


FIG. 7

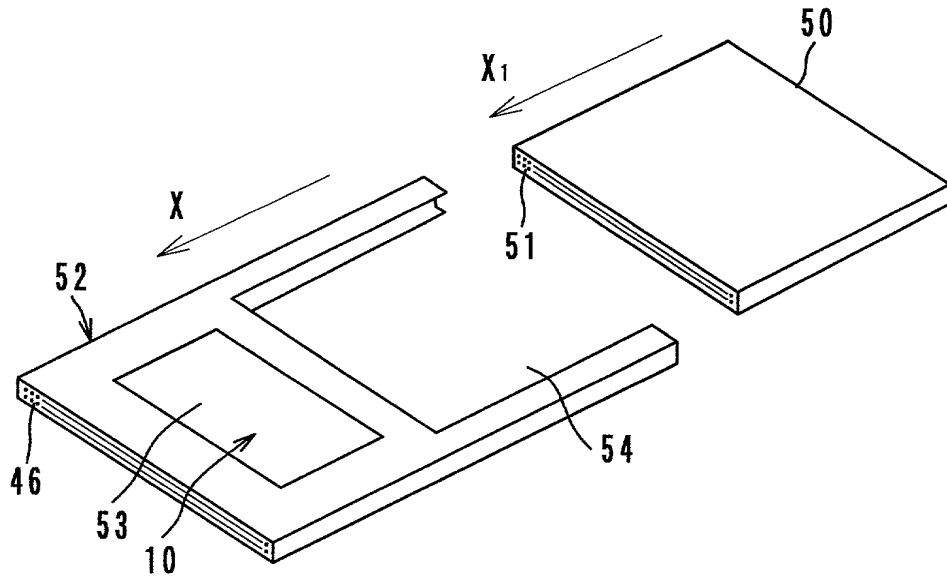


FIG. 8

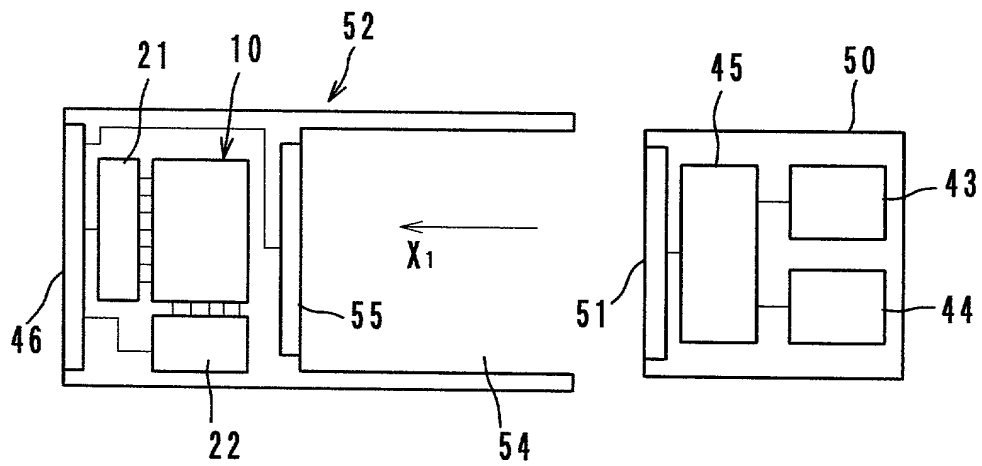


FIG. 9

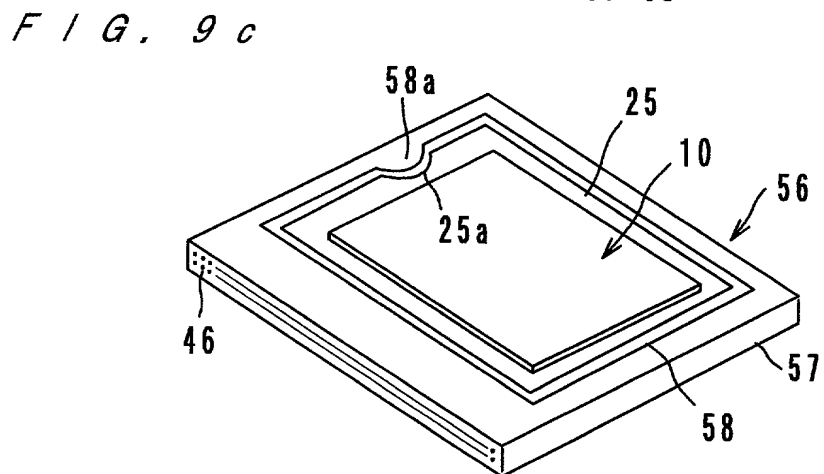
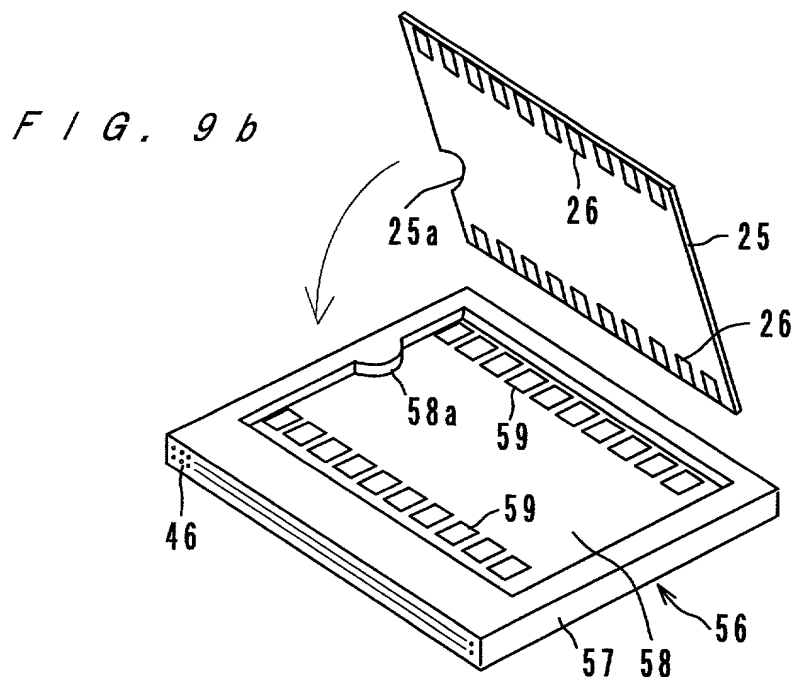
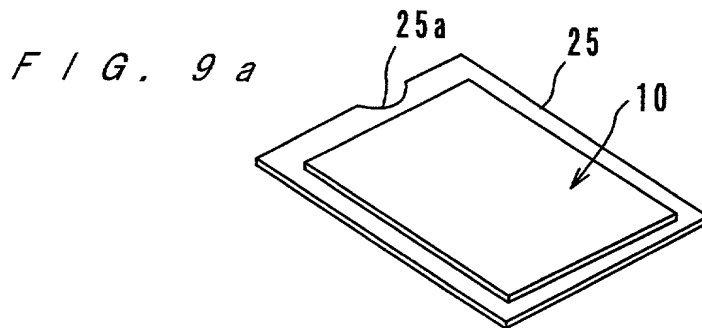


FIG. 10

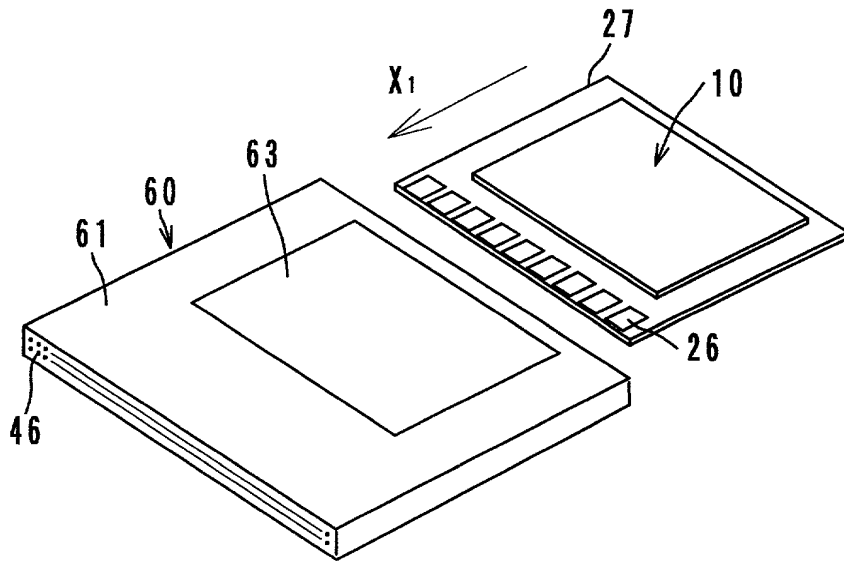


FIG. 11


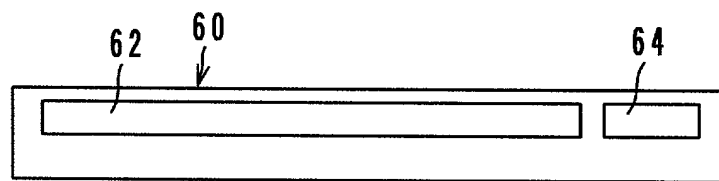


FIG. 12

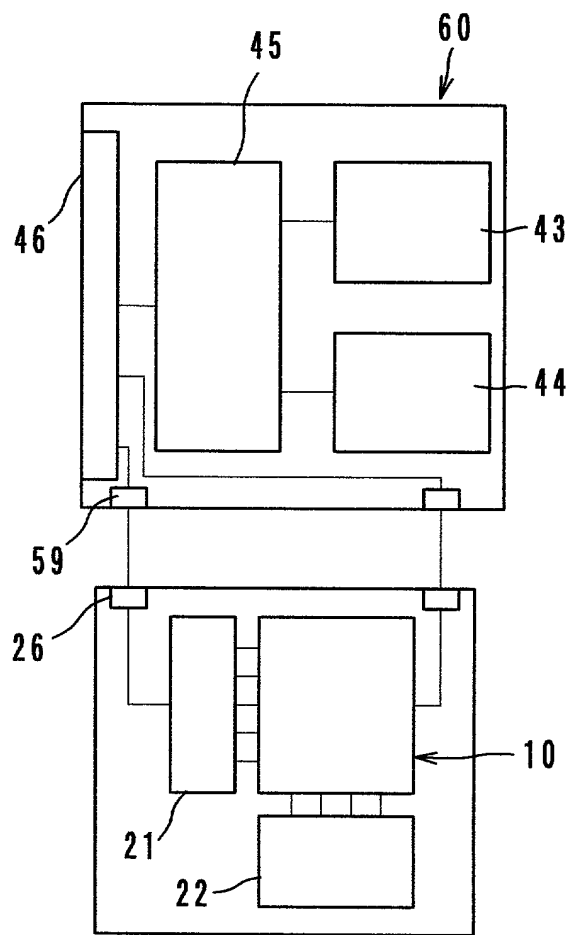

NOTED" SEE 32560

F / G . 1 3

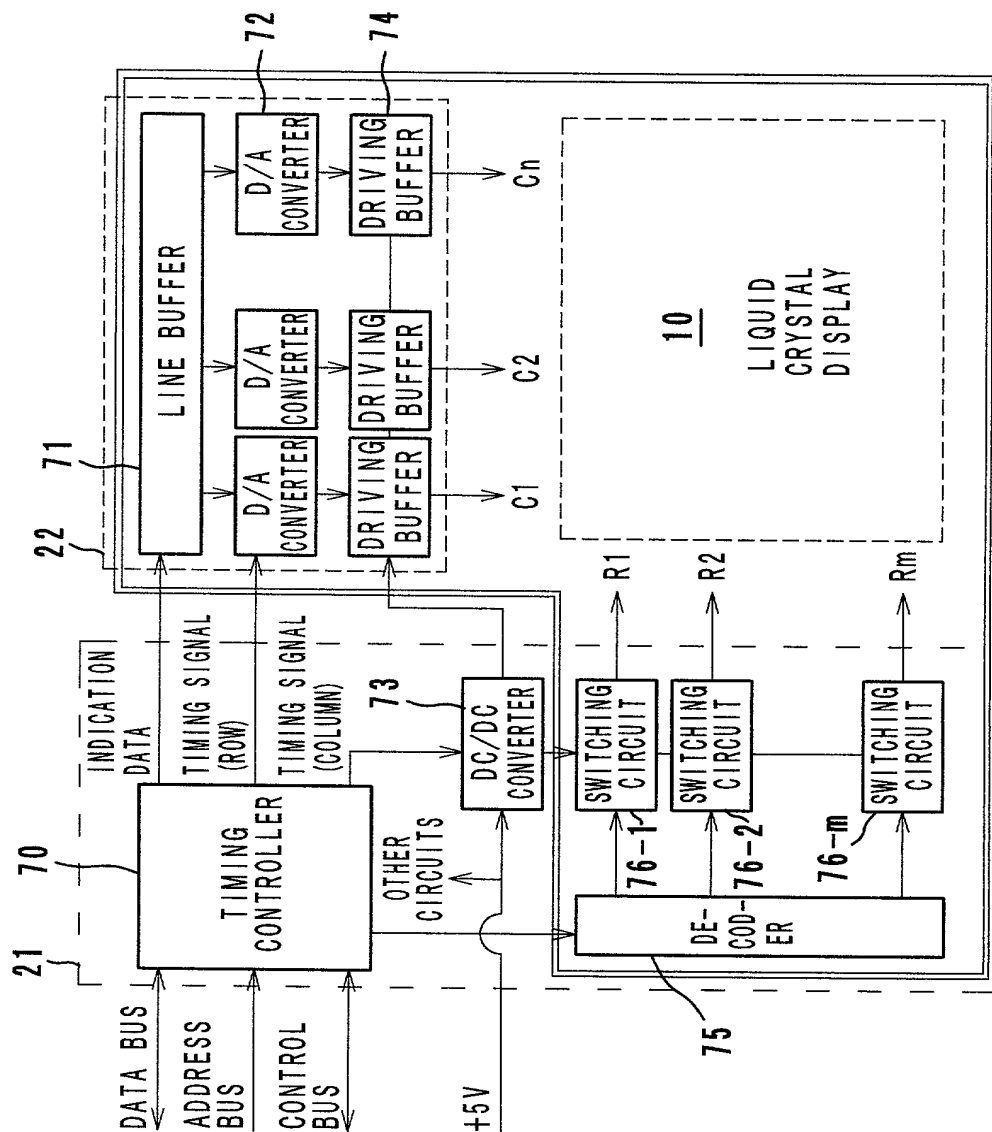


FIG. 14

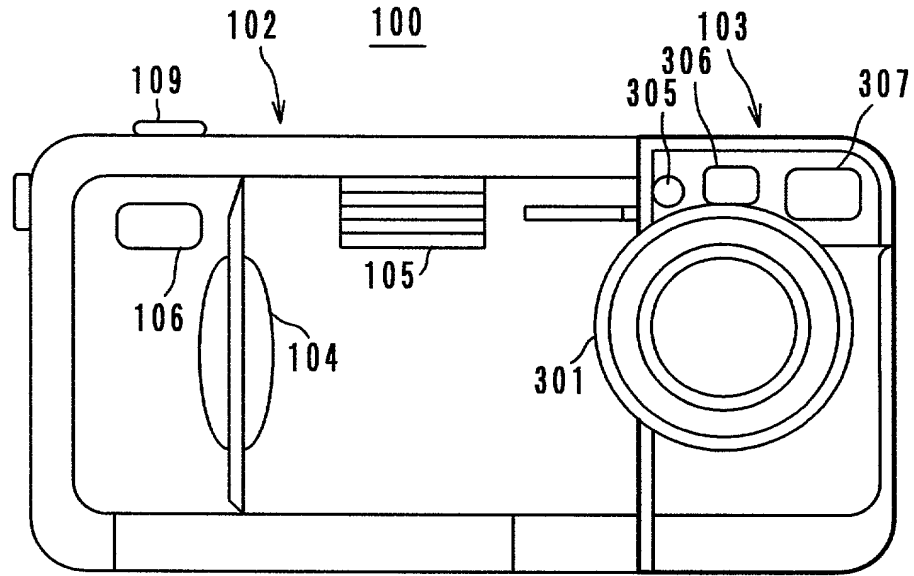


FIG. 15

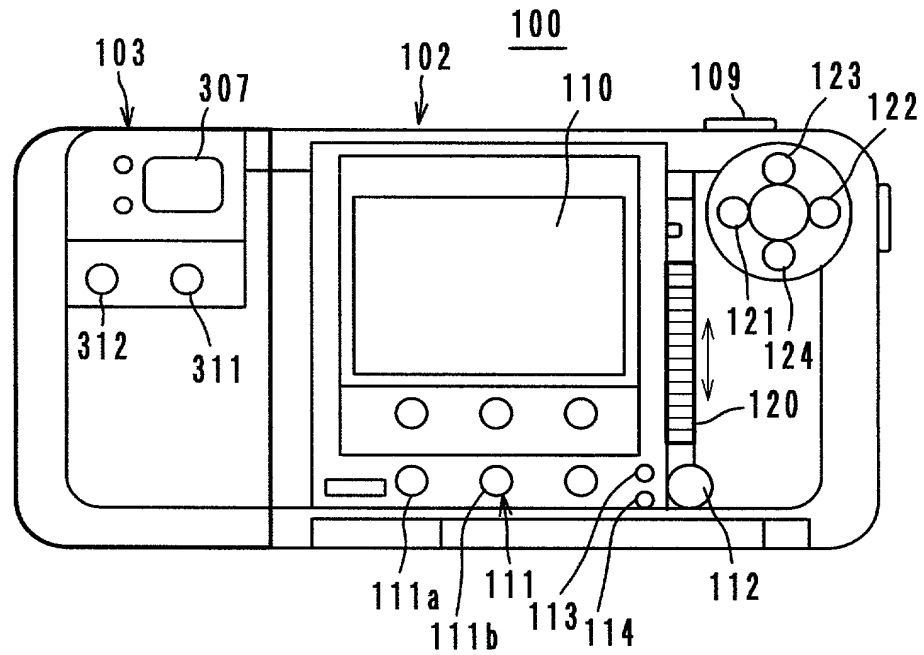


FIG. 16




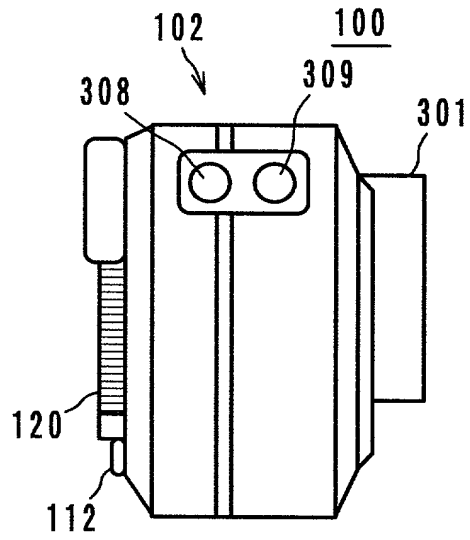


FIG. 17

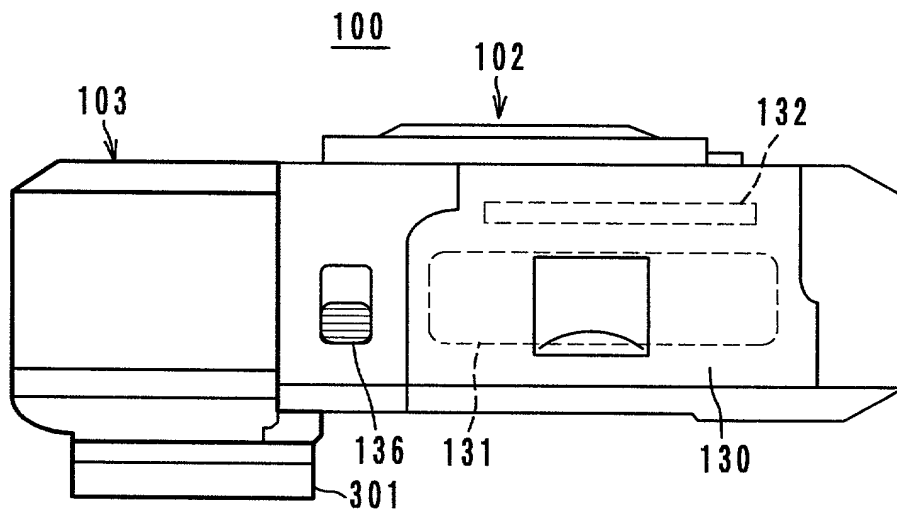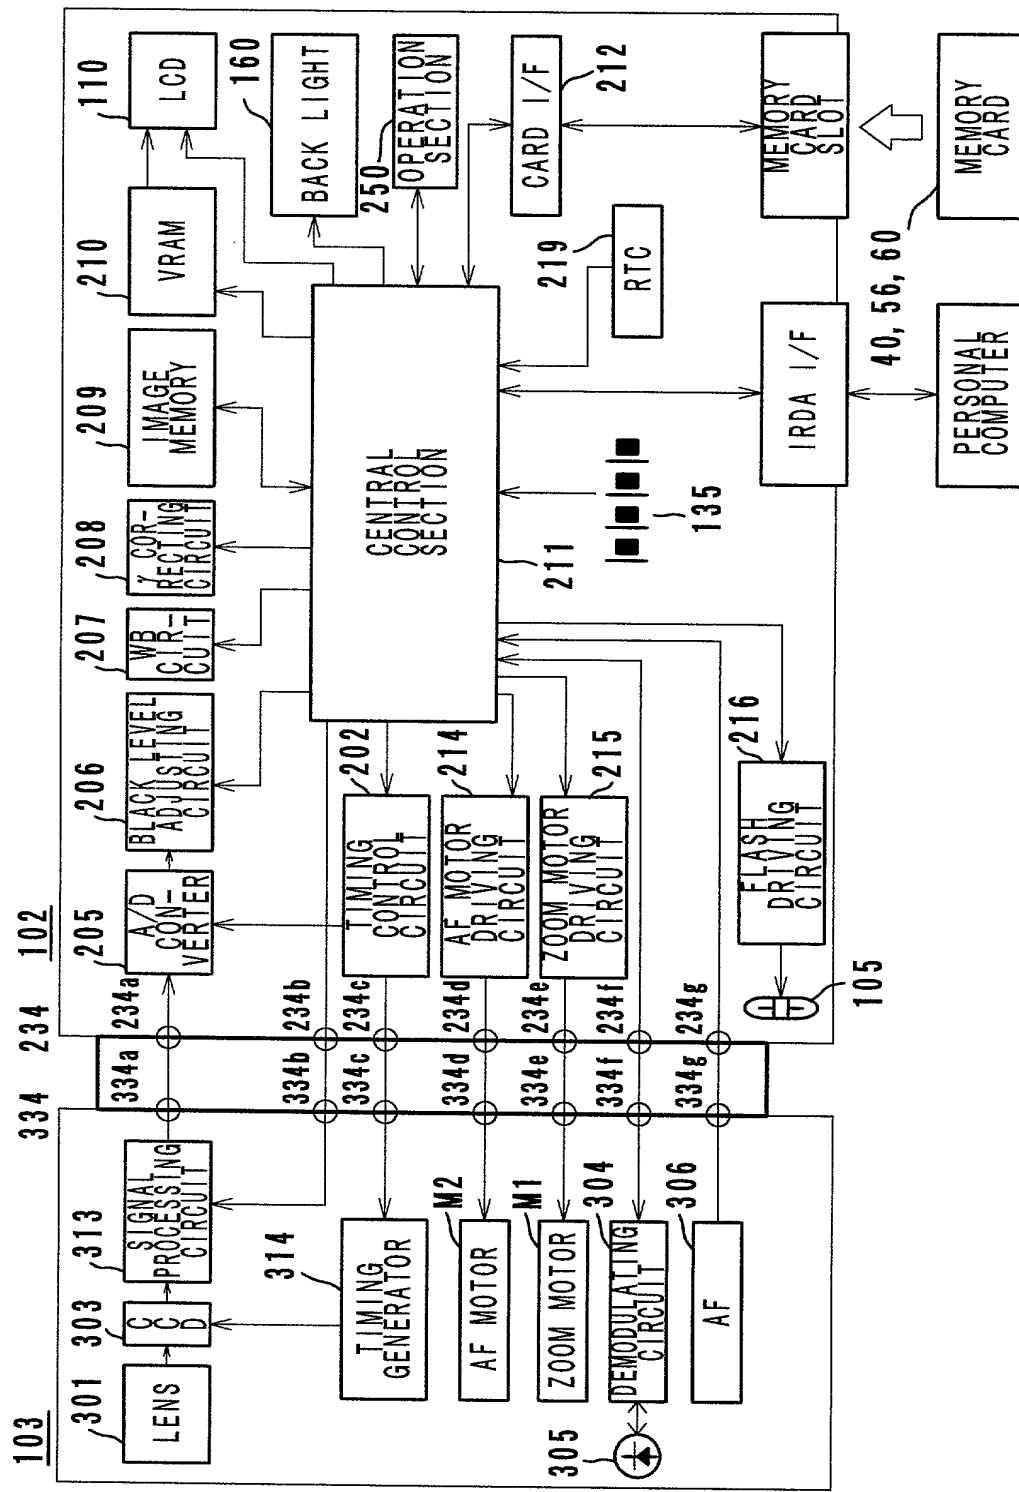

F / G . 1 8






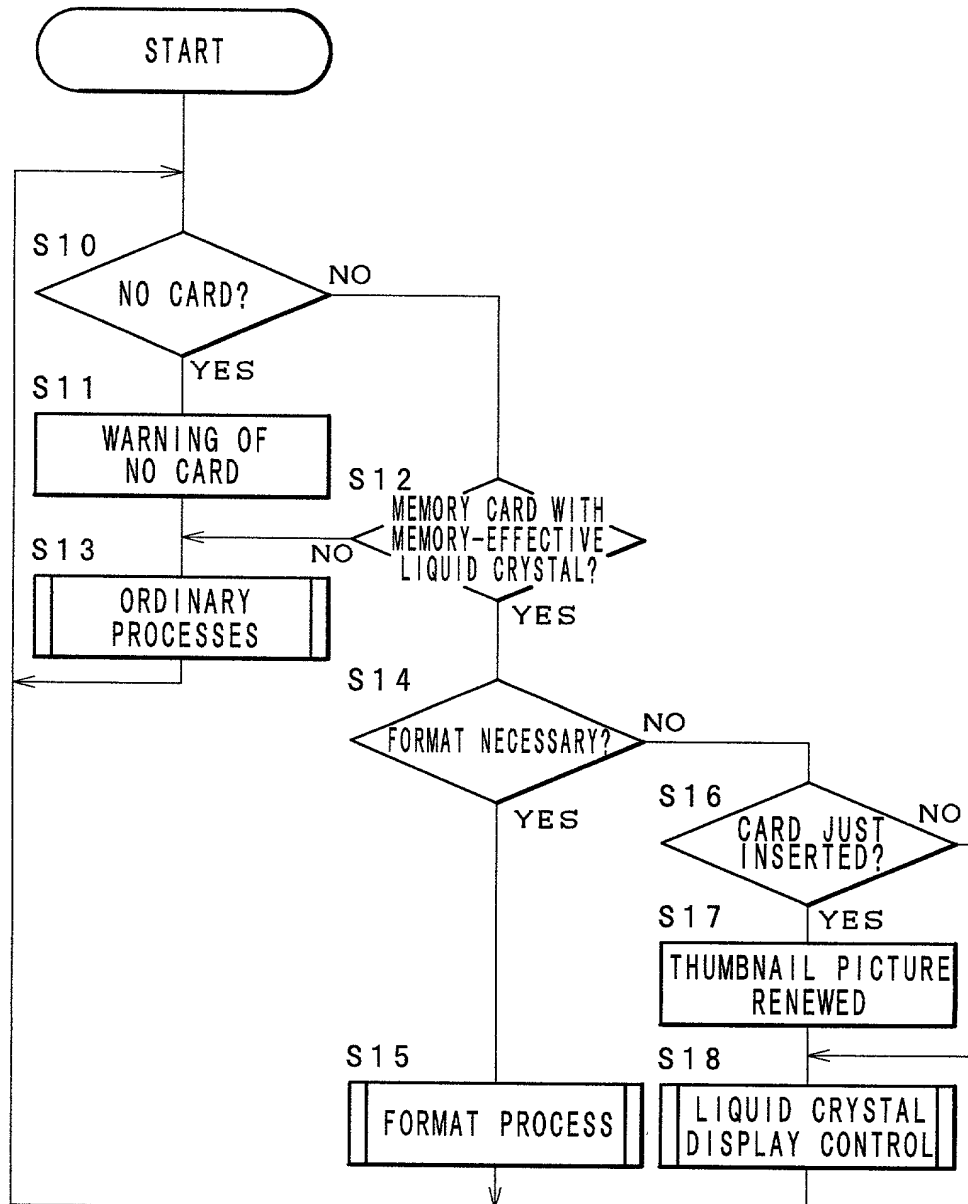


FIG. 22

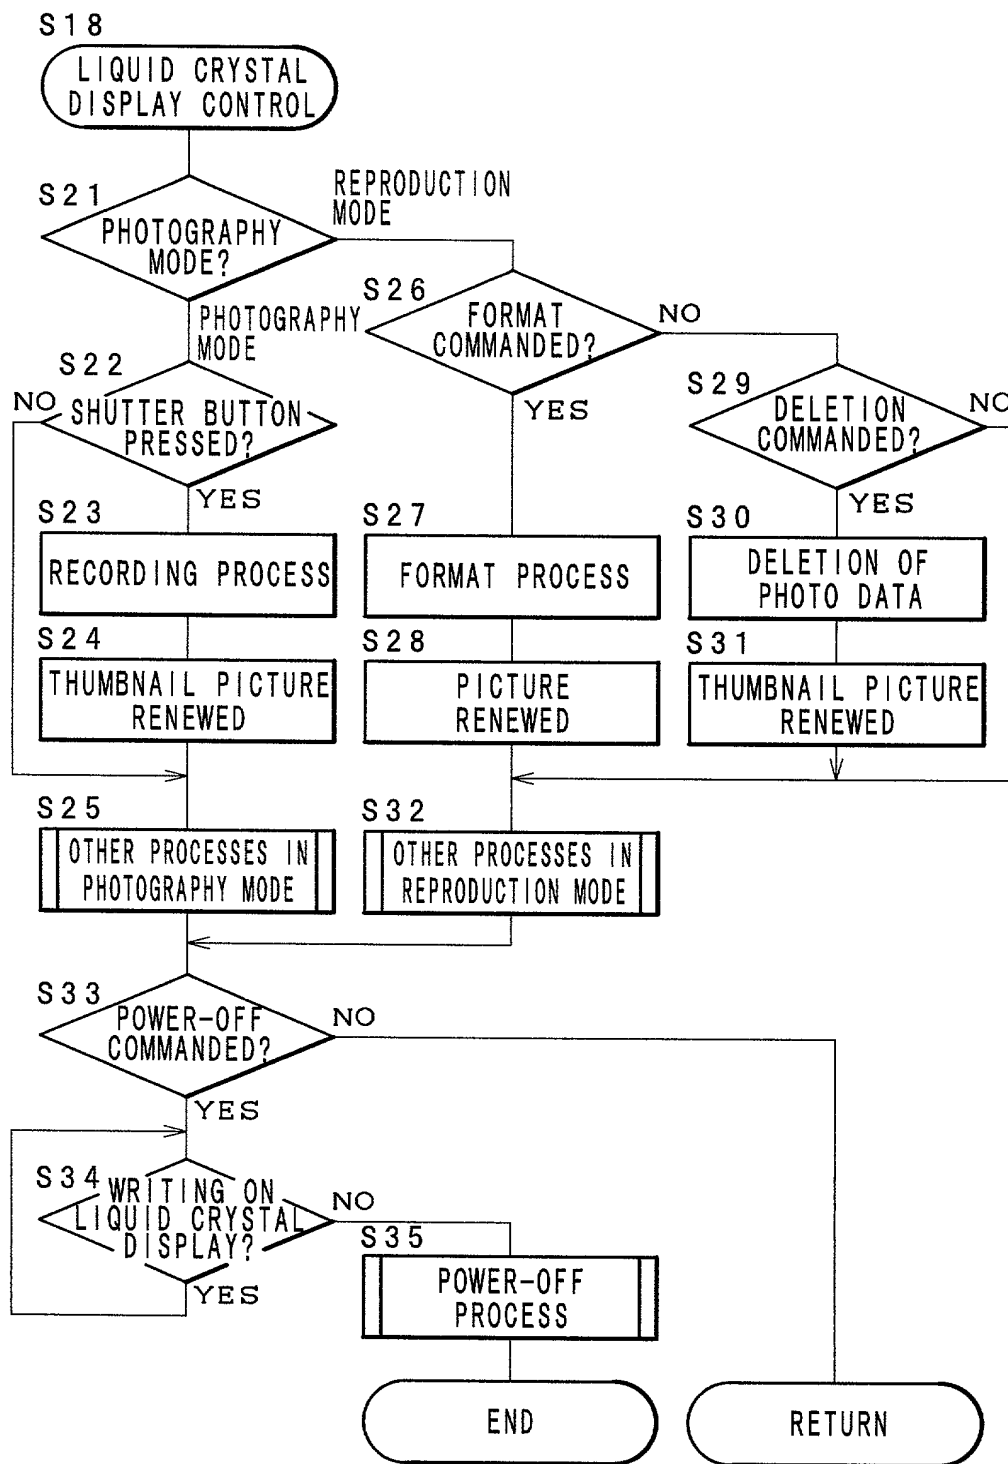

00270" 9522550

F I G . 2 3



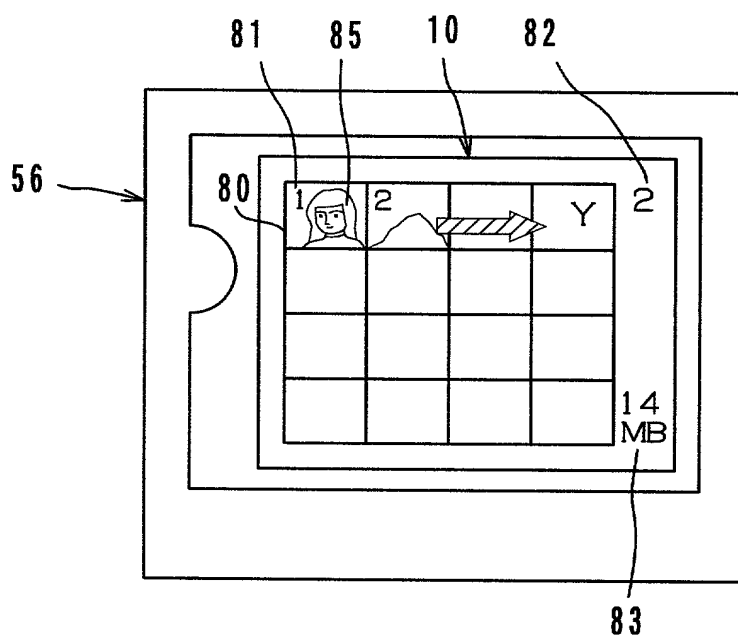



FIG. 24

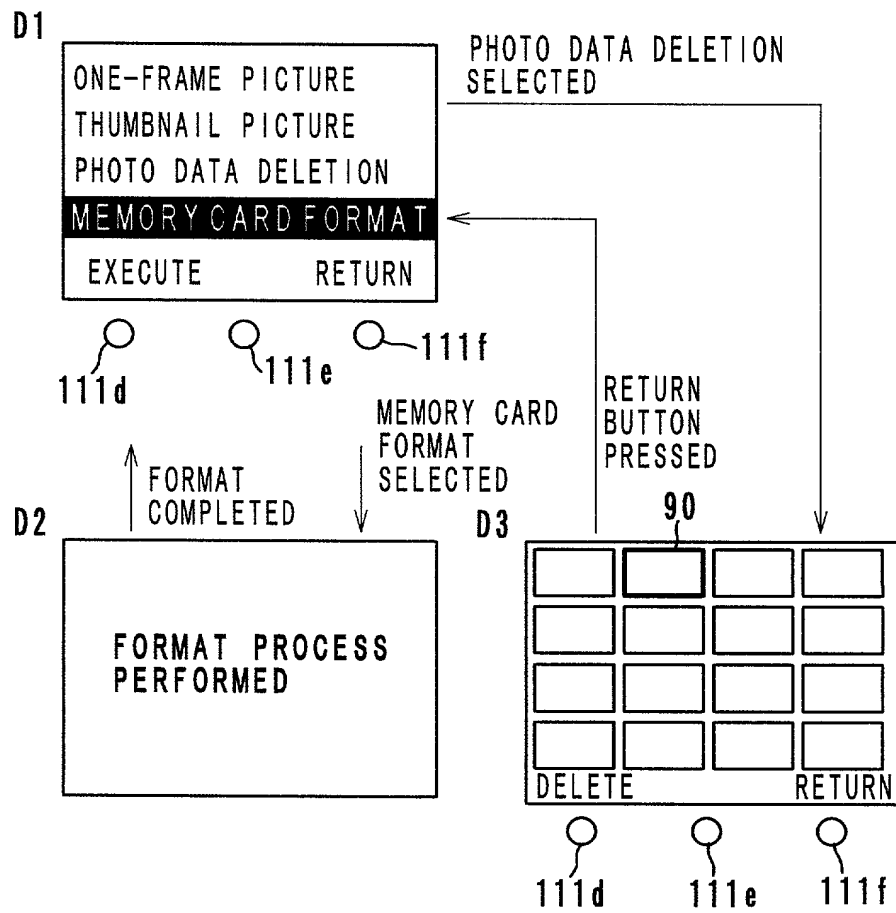


F I G . 2 5

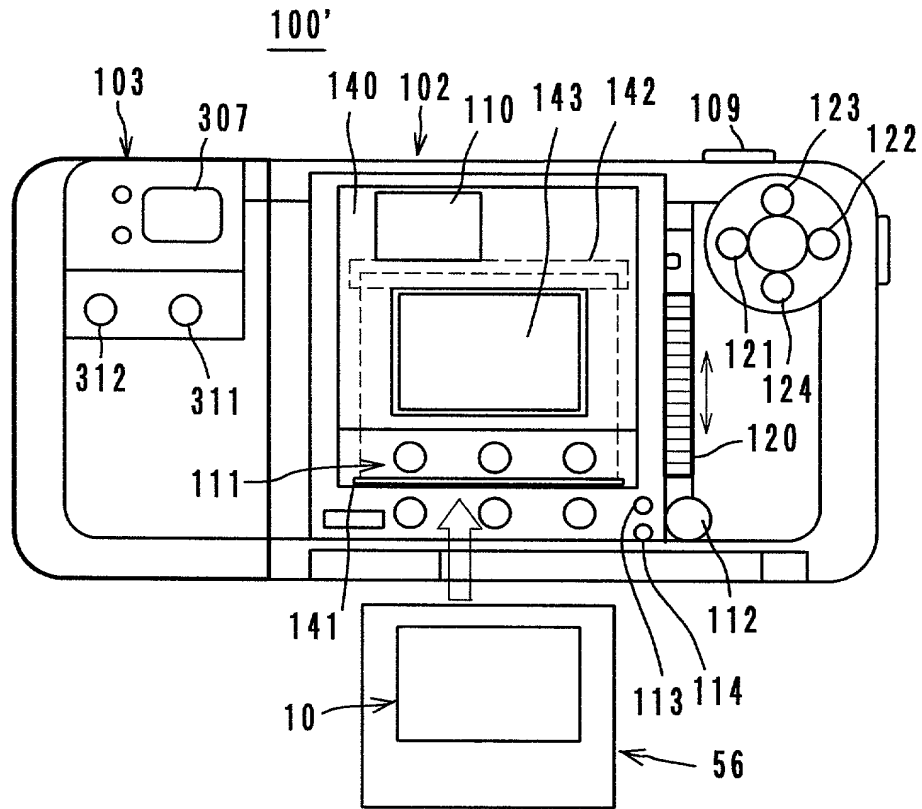

F I G . 2 6

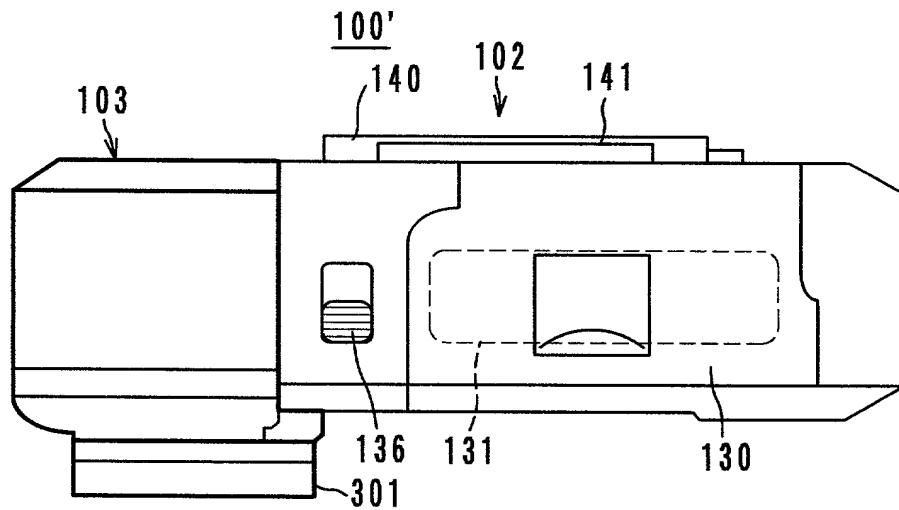


F I G . 2 7

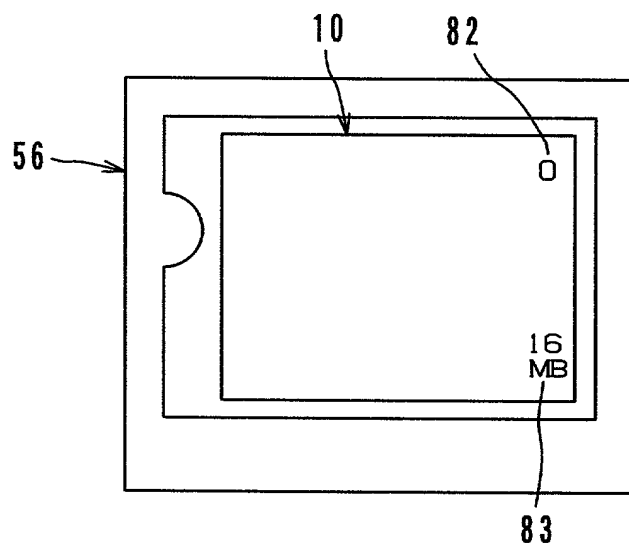


DO NOT SEE 2350

F I G . 2 8

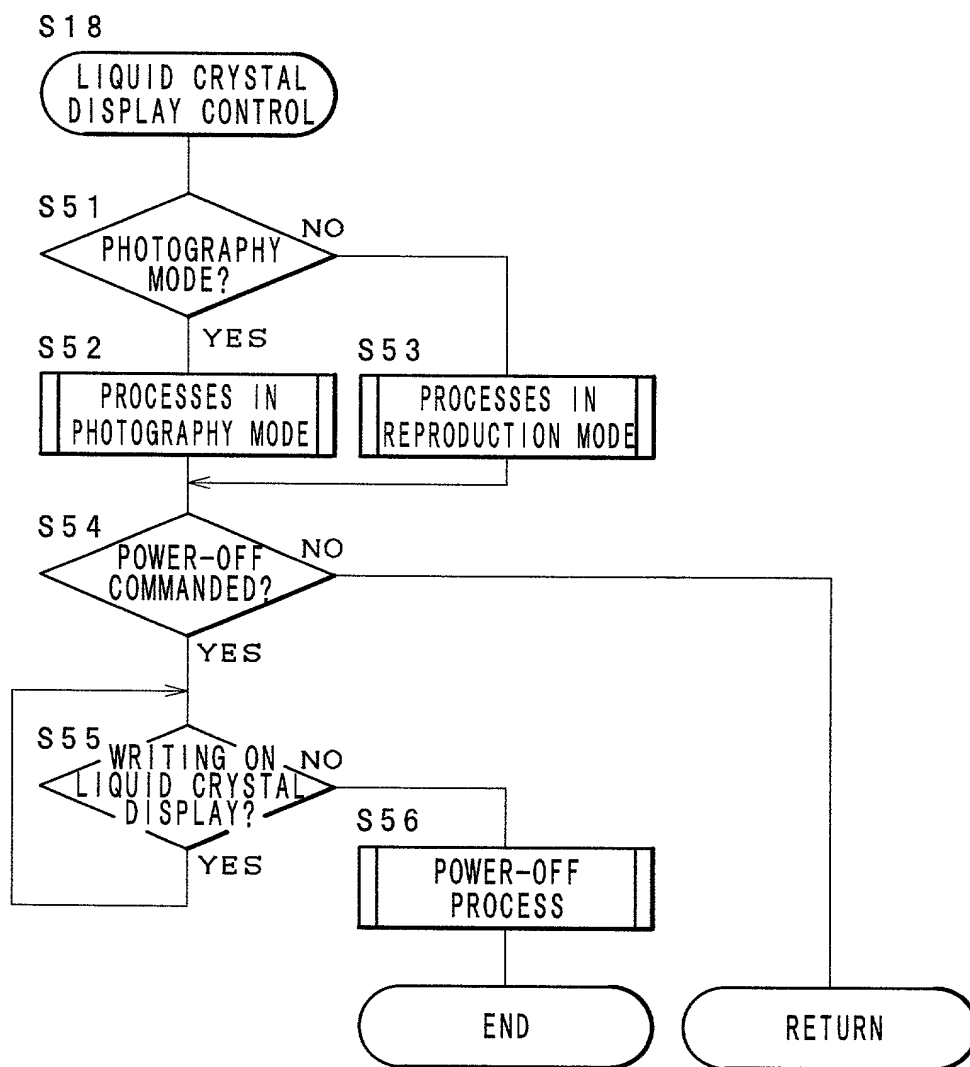


00700" 9502560


F I G . 2 9

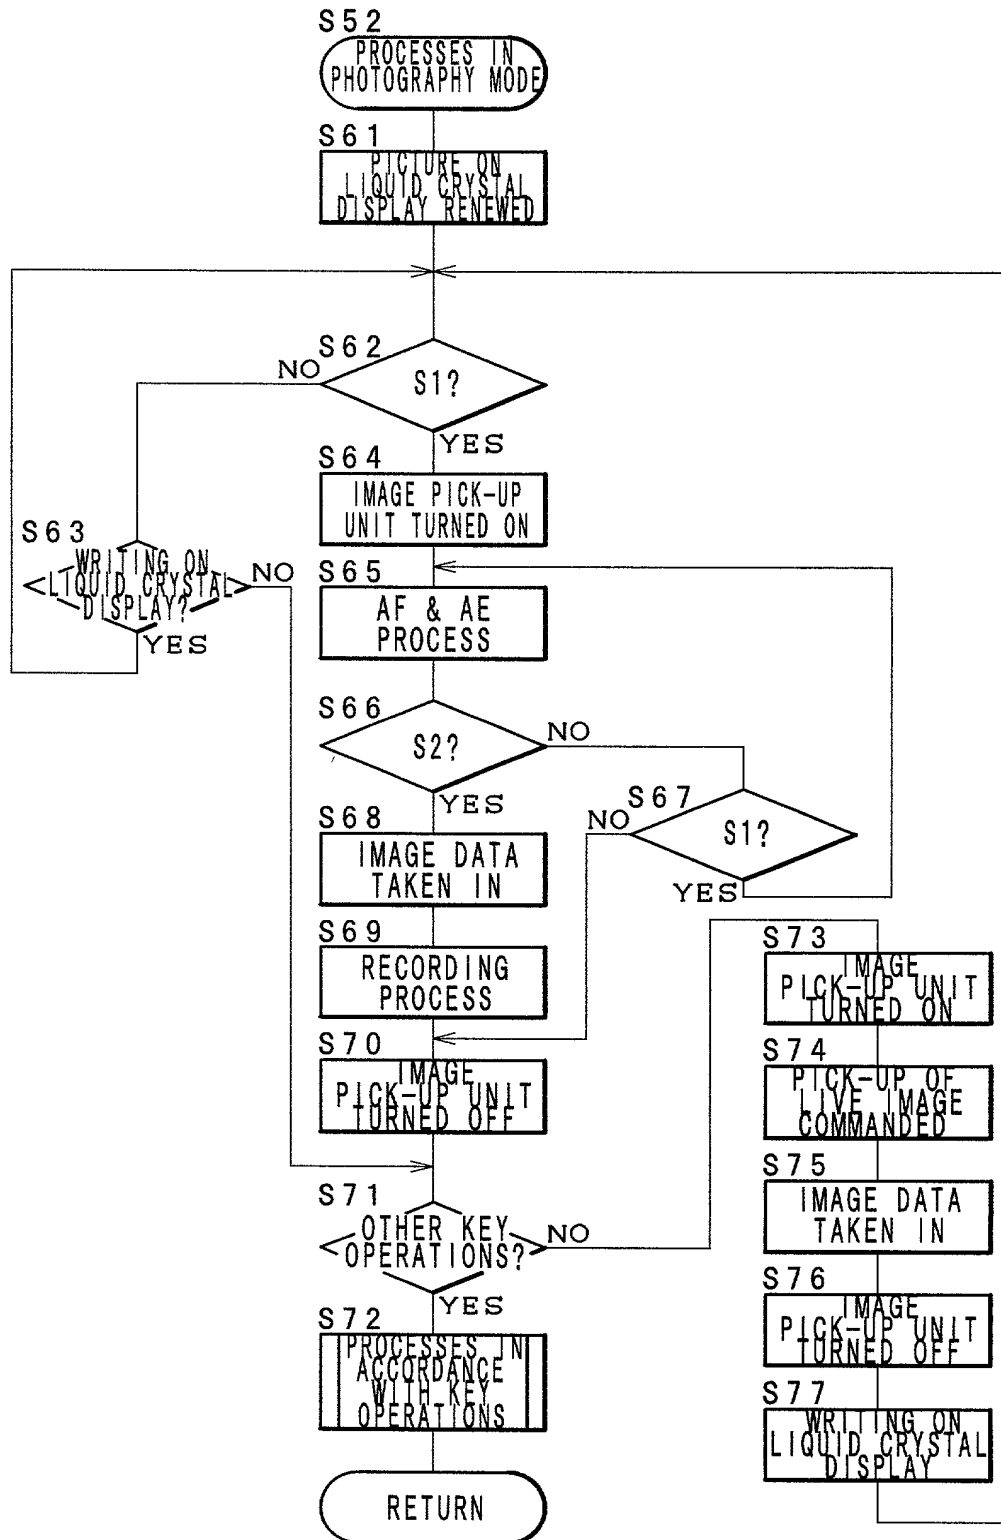

00522356 034700

FIG. 30

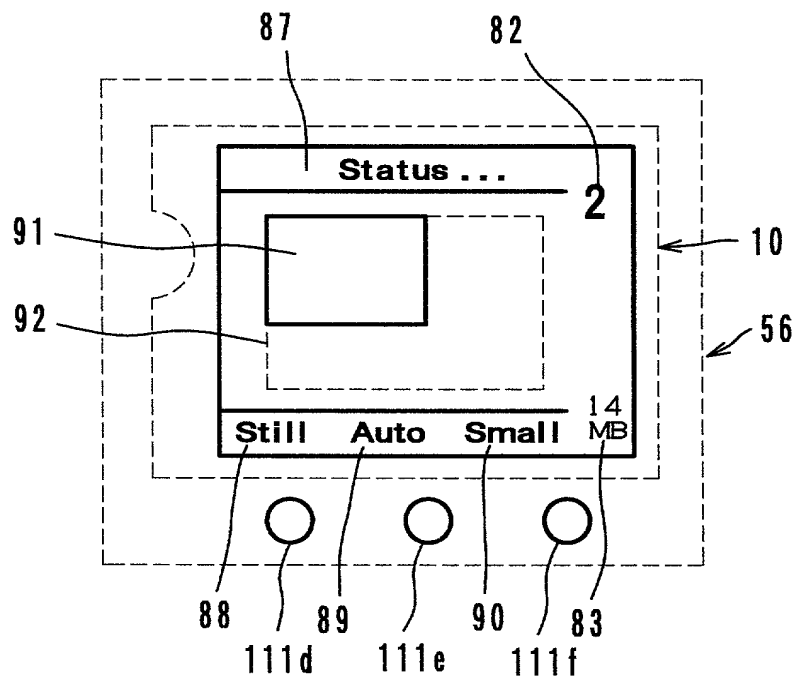

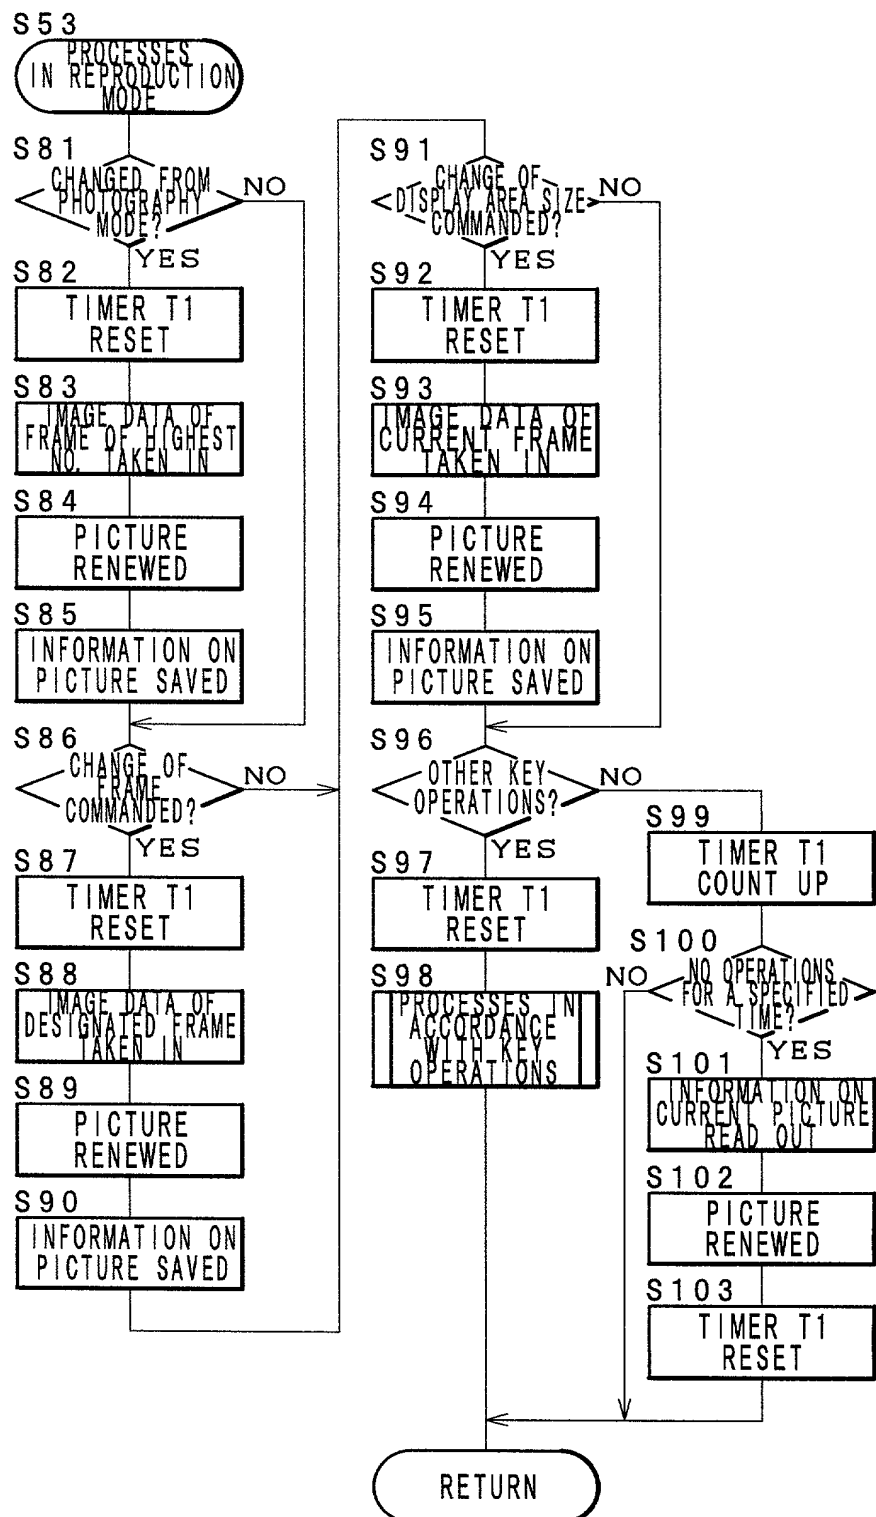

F I G . 3 2

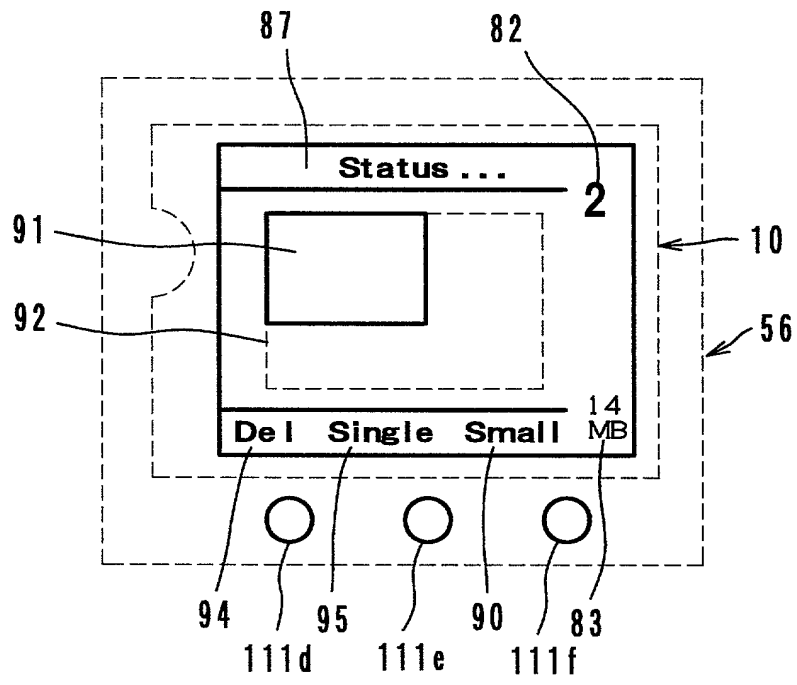


FIG. 33

007ED 95E2550

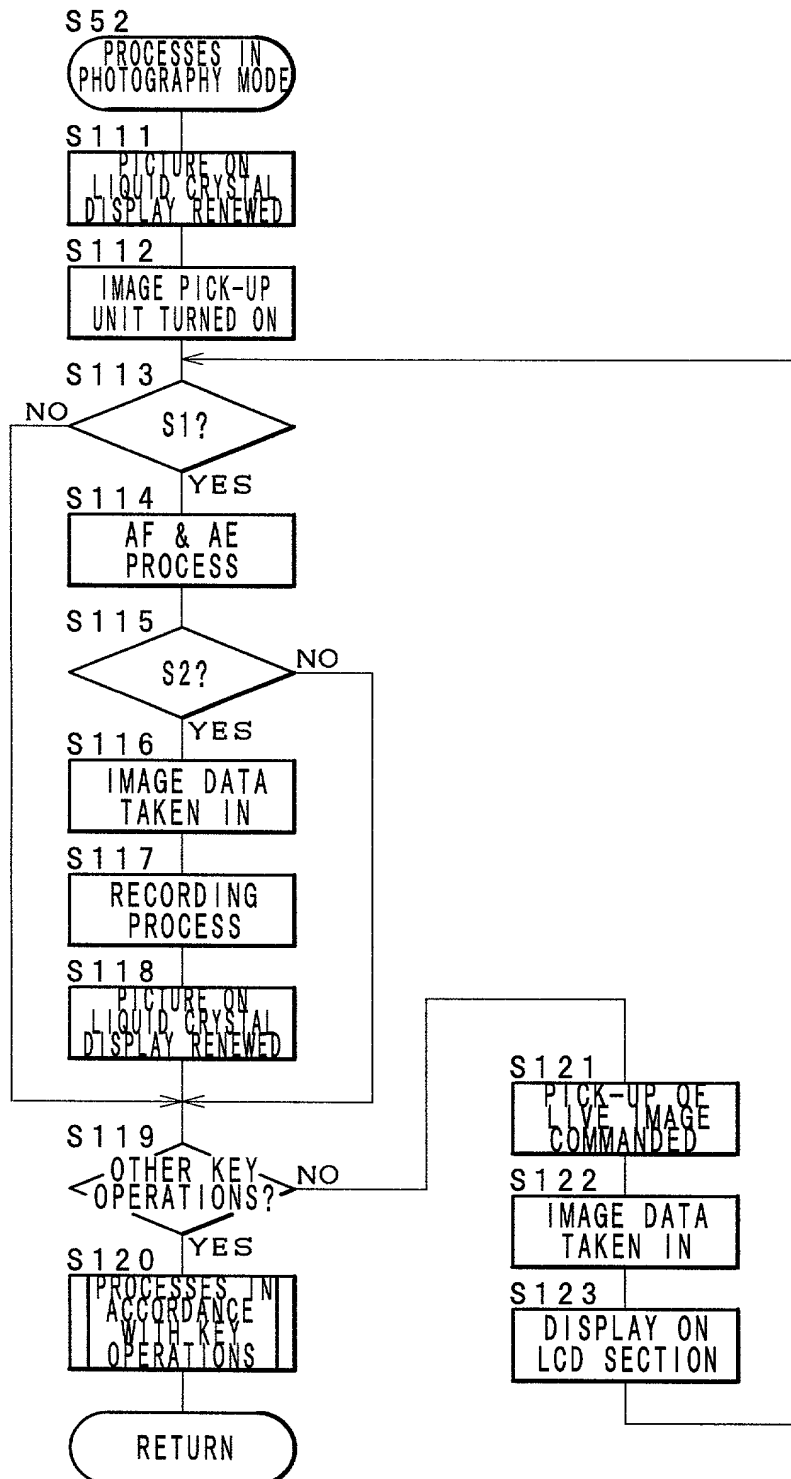


FIG. 34



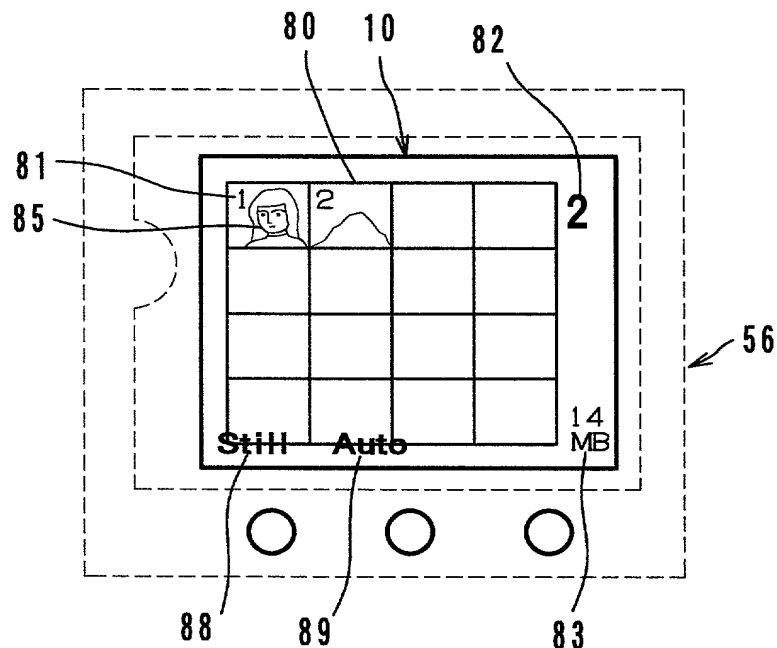



FIG. 35

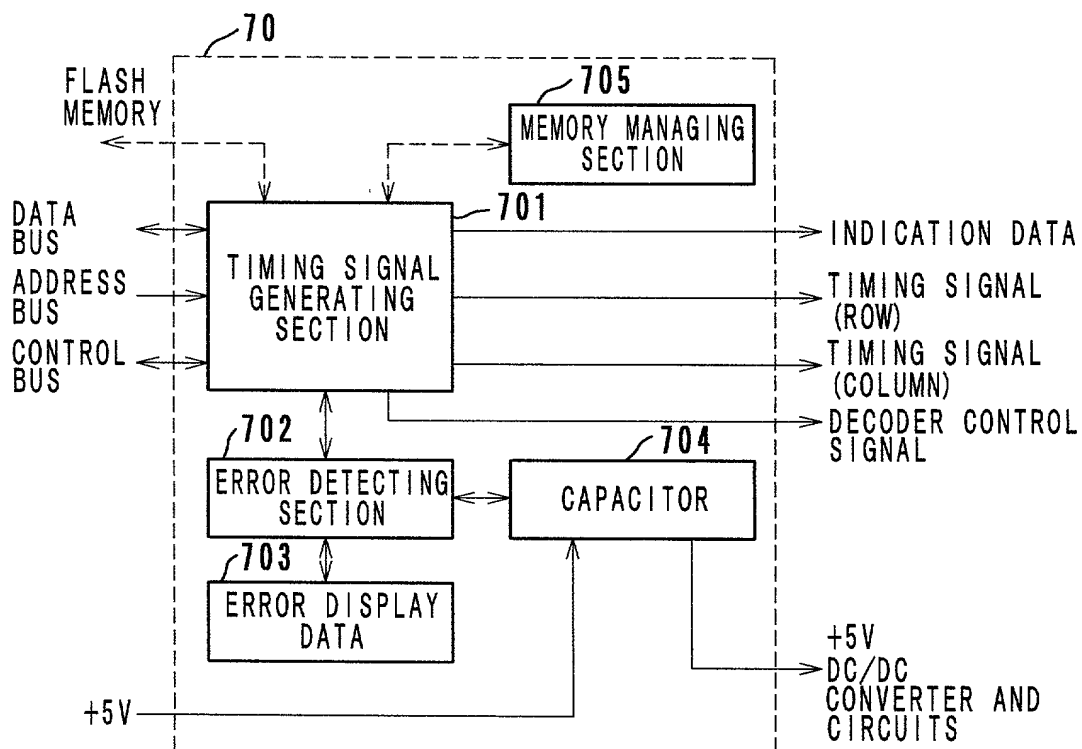

F I G . 3 6

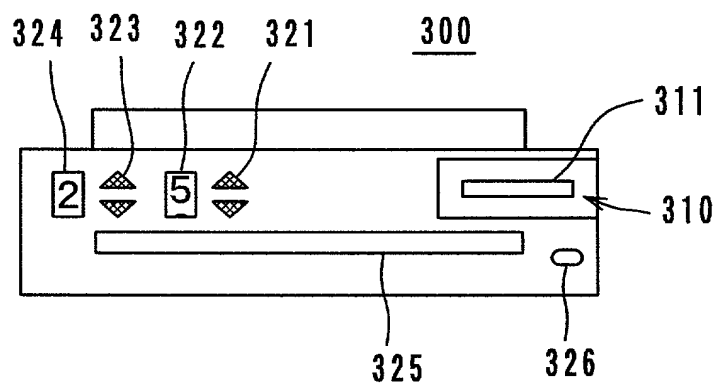

F I G . 3 7

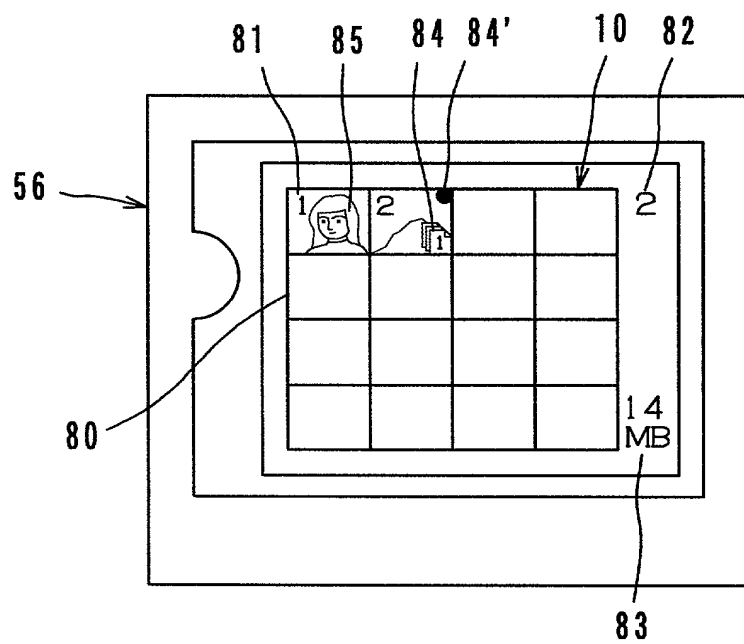

Attorney Docket No. _____

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship
are as stated next to my name.

I believe I am the original, first and sole inventor
(if only one name is listed below) or I and the other
persons listed below are the original, first and joint
inventors (if plural names are listed below) of the
subject matter which is claimed and for which a patent is
sought on the invention entitled

DRIVING DEVICE AND INFORMATION PROCESSING DEVICE FOR A DATA
STORAGE MEDIUM

the specification of which is attached hereto unless the
following box is checked:

☐

was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand
the contents of the above identified specification,
including the claims, as amended by any amendment
referred to above.

I acknowledge the duty to disclose information which
is material to patentability as defined in Title 37, Code
of Federal Regulations, Section 1.56.

09522356.031700

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATION(S)

Priority
Not Claimed

<u>11-78119 Pat.</u> (Number)	<u>Japan</u> (Country)	<u>23/03/1999</u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

<u> </u> (Application No.)	<u> </u> (Filing Date)
<u> </u> (Application No.)	<u> </u> (Filing Date)

09523356-031700

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Appl. No.)	(Filing Date)	(Status: Patented, Pending, Abandoned)
-------------	---------------	--

(Appl. No.)	(Filing Date)	(Status: Patented, Pending, Abandoned)
-------------	---------------	--

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

004760"35E82550

John J. Arnott, Reg. No. 39,095
Charles S. Cotropia, Reg. No. 27,189
Kathi A. Cover, Reg. No. 37,803
Daren C. Davis, Reg. No. 38,425
William R. Gustavson, Reg. No. 29,160
David L. Hitchcock, Reg. No. 30,067
Kelly J. Kubasta, Reg. No. 44,196
William D. McSpadden, Reg. No. 44,234
Gary A. Ray, Reg. No. 40,313
Steven P. Rhines, Reg. No. 38,595
Thomas N. Tarnay, Reg. No. 41,341
James W. Williams, Reg. No. 20,047

Send correspondence to:
SIDLEY & AUSTIN
717 North Harwood
Suite 3400
Dallas, Texas 75201-6507

Direct telephone calls to:
James W. Williams
Direct: (214) 981-3328
Main: (214) 981-3300
Attorney Docket No.:

Full name of sole or first inventor

<u>Masahito</u>	<u>(NMI)</u>	<u>NIIKAWA</u>
First	Middle	Last

Inventor's signature: Masahito NiiKawa

Date: Feb. 25, 2000

Residence: Sakai-Shi, Osaka, Japan
(city) (prefecture) (country)

Citizenship: Japan

Post Office Address: c/o MINOLTA CO., LTD.,
Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi,
Chuo-Ku, Osaka-Shi, Osaka 541-8556, Japan

[illegible]

Inventor's signature: Hiroaki Kubo

Residence: Mukou-Shi, Kyoto, Japan

Citizenship: Japan

Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi,

Chuo-Ku, Osaka-Shi, Osaka 541-8556, Japan